

09/07/00
JC916 U.S. PTO

TRANSMITTAL LETTER

09-08-00

FOR FILING PATENT APPLICATION SPECIFICATION AND DRAWING
TO OBTAIN FILING DATE

A

Box Applications

Assistant Commissioner
of Patents and Trademarks
Washington, D.C. 20231

Dear Sir:

Transmitted herewith for filing is the patent application of:

JC675 U.S. PTO
09/657208
09/07/00

Inventor: DONALD W. COLLINS
Filed: Concurrently herewith
Serial No.
For: METHOD AND APPARATUS FOR PROCESSING AN OBJECT
Attorney Docket No.: 1021-P-1

Enclosed are:

- (1) Specification (69 pages including title page; claims & abstract)
- (2) FOUR (3) sheets of FORMAL Drawings (Figs. 1-4)
- (3) Declaration and Power of Attorney
- (4) Declaration Verifying Small Entity Status
- (5) Filing Fee Check No. 21847 in the amount of \$384.00 [4 Indept. Claims].
- (6) Other:


The filing fee has been calculated as shown below:

BASIC FEE	FILED	EXTRA FEE	SMALL ENTITY
\$345.00	SMALL ENTITY		\$ 345.00
Total Claims	3	0	\$ 0.00
Indep. Claims	4	39.00	\$ 39.00
TOTAL:			<u>\$ 384.00</u>

Pursuant to the provisions of 37 C.F.R. §§ 1.10 and 1.53, applicant respectfully requests that this application be assigned a serial number and a filing dated of September 7, 2000, the date upon which the application was mailed to the U. S. Patent and Trademark Office by Express Mail No. EK 888 464 127US

9/07/00
Date

Respectfully submitted,



TOD R. NISSLE, Reg. No. 29,241

TOD R. NISSLE, P.C.

P.O. Box 55630

Phoenix, Arizona 85078

Tel: 480-970-8700

Fax: 480-970-8707

Email: nissle@nissle.com

**EXPRESS MAIL CERTIFICATION
ACCOMPANYING PAPER AND/OR FEE**

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventor: DONALD W. COLLINS
Filed: Concurrently herewith
Serial No.
For: METHOD AND APPARATUS FOR PROCESSING AN OBJECT
DOCKET NO.: 1021-P-1

BOX APPLICATIONS


Assistant Commissioner
of Patents and Trademarks
Washington, D.C. 20231

“EXPRESS MAIL” mailing label number: EK 888 464 127US

Date of Deposit: September 7, 2000

I hereby certify that the attached

Patent Application [69 pages including title page, specification, claims and abstract]; Four (4) Sheet[s] of Formal Drawings [Figs. 1-4]; Transmittal letter; Filing Fee Check No. 21847 in the amount of \$384.00; Declaration Verifying Small Entity Status; Declaration, Petition and Power of Attorney; and return postcard; are being deposited with the United States Postal Service “Express Mail Post Office to Addressee” service under 37 CFR 1.10 on the date indicated above and is addressed to “Box Patent Applications, Assistant Commissioner for Patents, Washington, D.C. 20231.”



TOD R. NISSLER, Reg. No. 29,241

09657308-090700

1 **IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

2 Applicant : DONALD W. COLLINS)

3 Serial No. :)

4 Filed : Concurrently herewith)

5 For : METHOD AND APPARATUS FOR PROCESSING)
6 AN OBJECT)

7 **DECLARATION VERIFYING SMALL ENTITY STATUS**
8 **UNDER 27 C.F.R. 19(f) AND 1.27(b)**

9 Asst. Commissioner of Patents
10 Washington, D.C. 20231

11 Dear Sir:

12 As a named inventor, I hereby state that I qualify as an independent inventor as defined in 37
13 C.F.R. 1.9 (c) for purposes of paying reduced fees under § 41(a) and (b) of Title 35, United States Code, to the
14 Patent and Trademark Office with regard to the above-identified patent.

15 I have not assigned, granted, conveyed or licensed and am under no obligation under contract
16 or law to assign, grant, convey or license any rights the invention to any person who could not be classified as
17 an independent inventor under 27 C.F.R. 1.9(c) if that person had made the invention, or to any concern which
18 would not qualify as a small business concern under 37 C.F.R. 1.9(d) or a nonprofit organization under 37
19 C.F.R. 1.9 (e). Any person, concern or organization to which I have assigned, granted, conveyed or licensed or
20 am under an obligation under contract or law to assign, grant, convey or license any rights in the invention is
21 identified below:

22 I hereby certify that this correspondence is being
23 deposited with the United States Postal Service as
24 EXPRESS MAIL LABEL NO EK 888 464127US
25 in an envelope addressed to: Box Applications,
26 ASST. COMMISSIONER OF PATENTS AND TRADEMARKS,
27 WASHINGTON, D.C. 20231 on: September 7, 2000
28 [Signature] 9-7-00
TOD R. NISSIE, Reg. No 29,241 DATE

09657208-090700

1 Full Name: N/A

2 Address: _____

3 _____

4 ☐ Individual ☐ Small Business ☐ Non profit Organization

5

6

7 Full Name: N/A

8 Address: _____

9 _____

10 ☐ Individual ☐ Small Business ☐ Non profit Organization

11

12 I acknowledge the duty to file, in this patent, notification of any change in status resulting in

13 loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or

14 any maintenance fee due after the date on which status as a small entity is no longer appropriate. [37 C.F.R.

15 1.28(b)]

16

17 I hereby declare that all statements herein of my own knowledge are true and that all

18 statements made on information and belief are believed to be true; and further that these statements were made

19 with the knowledge that willful false statements or the like so made are punishable by fine or imprisonment, or

20 both, under §1001 to Title 18 of the United States Code, and that such willful false statement may jeopardize the

21 validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

22

23

24

25

26

27

28

1 Name of Inventor: DONALD W. COLLINS
2 Address: 1045 East Sandpiper Drive
3 Tempe, Arizona 85283
4 Signature: *Donald W. Collins*
5 Date: 09/01/00

8 Name of Inventor: N/A
9 Address: _____
10 _____
11 Signature: _____
12 Date: _____

14 Attorney's Docket No.: 1021-P-1

002060" 8027960

METHOD AND APPARATUS FOR PROCESSING AN OBJECT

By

Donald W. Collins

Of

Phoenix, Arizona

A Citizen of the United States of America

I hereby certify that this correspondence is being
Deposited with the United States Postal Service as
U.S. Express Mail No. EK 888 464 127 US,
in an envelope addressed to: Commissioner of
Patents and Trademarks, Washington, D.C.
22031 on September 7, 2000.

TOD R. NISSELE, Reg. No. 29,241

September 7, 2000
DATE

00/050" 802/560

METHOD AND APPARATUS FOR PROCESSING AN OBJECT

This invention relates to a system for processing an object.

More particularly, the invention relates to a processing system that includes multiple process steps, which includes multiple machines, and which utilizes at least one of the machines in more than one process step.

In another respect, the invention relates to a processing system of the type described that processes simultaneously more than one product.

In a further respect, the invention relates to a processing system of the type described which evaluates the queues of upcoming machines in order to determine which lot in the queue of a machine will be selected and processed first.

Manufacturing systems that utilize a plurality of machines to process a device or other object are well known. Such systems often utilize the same machine in more than one process step. When the same machine is utilized in more than one process step, backlogs of devices can accumulate waiting to be processed by the machine. The buildup of such backlogs is exacerbated when the machine breaks down or is being maintained. Such backlogs interfere with the timely passage of a device through all the steps in a manufacturing process and can significantly increase the cost of processing the device. This is especially the case in systems that utilize many machines and require many process steps. The dynamics and management of such multi-machine, multi-process step

system is typically complicated and difficult.

Accordingly, it would be highly desirable to provide an improved method and apparatus for managing the passage of a device or object through a manufacturing system that includes many process steps, that includes multiple machines, and that uses machines that are used in more than one process step.

Therefore, it is an object of the invention to provide an improved method and apparatus for controlling the travel of a device or object through multiple process steps in a manufacturing system.

Another object of the invention is to provide an improved method and apparatus for streamlining the processing of a device by comparing the queue sizes of upcoming process steps with the queue size of the process step which a device is currently undergoing.

A further object of the invention is to provide an improved method and apparatus for facilitating the processing of a device by providing and continuously monitoring both a history of prior steps completed during the processing of the device and a listing of the upcoming steps required to complete the processing of the device.

These and other, further and more specific objects and advantages of the invention will be apparent to those skilled in art from the following detailed description thereof, taken in conjunction with the drawings, in which:

Fig. 1 is a diagram illustrating a boat constructed in accordance with the invention;

Fig. 2 is a diagram illustrating lots in the queues of processing machines;

Fig. 3 is a block flow diagram illustrating a processing method in accordance with the invention; and,

Fig. 4 is a block flow diagram illustrating the steps for completing the processing method of Fig. 3.

Briefly, in accordance with my invention, I provide an improved process for processing at least one product. The process processes a plurality of lots of the product and comprises a sequence of process steps including a first process step; a queue for the process step; a plurality of lots of the product in the queue; and, a machine used in the first process step to process the product. The process can also, if desired, include at least a second process step during which the machine is used to process the product. The improved process increases the efficiency of processing the product and reduces the time

required for the product to complete the process. The improved process includes the steps of determining the lots of the product in the queue of the first process step; of determining for each lot in the queue of the first process step the process step which was completed immediately prior to the lot entering the queue of the first process step; and, of determining for each lot in the queue of the first process step at least the next subsequent process step to be completed by the lot after the lot is processed during the first process step, the present queue size for the next subsequent process step, and the historical average queue size for the next subsequent process step. The improved process also includes the steps of determining for the first process step the present queue size, and the historical average queue size; of making a first determination by determining whether the present queue size for the next subsequent process step is one of a pair consisting of greater than the historical average queue size for the next subsequent process step, and less than the historical average queue size for the next subsequent process step; and, making a second determination by determining whether the present queue size for the first process step is one of a pair consisting of greater than the historical average queue size of the first process step, and less than the historical average queue size of the first process step. Finally, the improved process includes the step of comparing for each lot the first determination with the second determination to prioritize which lot is selected for processing during the first process step.

In another embodiment of the invention, I provide an improved system for processing at least one product. The improved system includes a sequence of process steps; at least a first machine in each of the process steps; and, a plurality of lots in the queue of the first machine. Each lot includes at least one unit of the product, a memory, and a first transmitter-receiver device operatively associated with the memory. The memory includes data identifying at least one of a pair including the lot, and a unit of product, and includes data identifying each of the process steps of that product. The improved system also includes a second transmitter-receiver device; a controller operatively associated with the second transmitter-receiver device and the first machine to generate signals causing the second transmitter-receiver device to communicate with the first transmitter-receiver device and the memory in each of the lots to determine the previous process step completed by the lot, to confirm that the next process step for the lot

requires the first machine, and to generate information used by the first machine to process that product. If desired, the controller can cause the second transmitter-receiver device to communicate to the first transmitter-receiver device and memory the time required for the first machine to process the lot.

Turning now to the drawings, which depict the presently preferred embodiments of the invention for the purpose of illustrating the practice thereof, and not by way of limitation of the scope of the invention, and in which like reference characters refer to corresponding elements throughout the several views, Fig. 1 illustrates a boat 50 carrying wafers 51, a transmitter-receiver 52, and a book 53. The wafers 51 are processed by various machines. The transmitter/receiver 52 presently sends airborne RF signals but can send or transmit microwave, fiber optic, or any other desired signals. Transmitter/receiver 52 can send signals by contacting or passing in the proximity of another transmitter/receiver or of other signal receiving means connected to a transmitter/receiver. The boat 50, wafers 51, transmitter-receiver 52, and book 53 comprise a lot.

Fig. 2 illustrates lots 11 and 12 in the queue 10 of machine 29 ready for processing by machine 29. Machine 15 includes a control 14 and transmitter/receiver 13. Lots 18 to 22 are in the queue 17 of Machine 25 and are ready for processing. Machine 25 includes a control 24 and transmitter/receiver 23. Lots 27 and 28 are in the queue 26 of machine 31 and are ready for processing. Machine 31 includes control 30 and transmitter/receiver 29.

After a lot 11, 12 is processed by machine 15, the lot is sent 62 to the next machine.

After a lot 18 to 22 is processed by machine 25, the lot is sent 61 to the next machine.

After a lot 27, 28 is processed by machine 31, the lot is sent 60 to the next machine.

Figs. 3 and 4 define a system for processing a product including "define process steps for product" 40, "define machine(s) used in each process step" 41, "determine lots in queue of current process step" 42, "determine process step completed by each lot prior to entering queue of current process step" 43, "determine for each lot in queue (1) the next process step after the current process step, (2) the current queue size for the next process step, and (3) the historical average queue size for the next process step" 44, and "determine for the present process step (1) the present queue size, and (2) the historical average queue size" 46. As shown in Fig. 4, the process of Fig 3 is completed with the

19	10	3	HOOD 6 Bath, Piranha Diffusion
20	5	130	Microscope
21	10	3	HOOD 6 Bath, Piranha Diffusion
22	1	1	HOOD 5, HF 10:1 Diffusion
23	14	4	HOOD 7 Bath, Summa Clean
24	330	22	Furnace 42
25	10	125	White Light Inspection
26	1	1	HOOD 5, HF 10:1 Diffusion
27	10	125	White Light Inspection
28	640	67	Measure, CD AMS 200
29	1	73	Peruse

EXAMPLE 2

Product B has the process flow set forth below in Table II.

TABLE II
PROCESS FLOW FOR PRODUCT B

<u>Step</u>	<u>Cycle Time (Minutes)</u>	<u>Machine</u>	<u>Description of Machine/Function</u>
1	15	34	Pull substrate
2	1	32	Pre-inspection
3	10	3	HOOD 6 Bath, Piranha Diffusion
4	14	4	HOOD 7 Bath, Summa Clean
5	178	19	Furnace 33
6	6	125	White Light Inspection
7	1	73	Peruse
8	48	74	Vapor Prime, HMDS
9	30	60	Coater, SVG Track 1 neg
10	1	73	Peruse
11	65	69	P & E Aligner 5
12	1	73	Peruse
13	30	65	Developer, SVG Track 1 neg
14	1	73	Peruse
15	20	130	Microscope
16	35	93	Oven, Bake Hard Neg
17	18	80	Bath, BOE 6:1 Etch

18	7	130	Microscope
19	10	3	HOOD 6 Bath, Piranha
			Diffusion
20	5	130	Microscope
21	10	3	HOOD 6 Bath, Piranha
			Diffusion
22	1	1	HOOD 5, HF 10:1 Diffusion
23	14	4	HOOD 7 Bath, Summa
			Clean
24	330	22	Furnace 42
25	10	125	White Light Inspection
26	178	19	Furnace
27	10	125	White Light Inspection
28	1	73	Peruse
29	48	74	VAPOR PRIME, HMDS
30	30	61	Coater, SVG Track 3 neg
31	1	73	Peruse

EXAMPLE 3

The historical average queue size for each machine utilized when only Product A is in production on a factory floor is set forth below in Table III.

TABLE III

HISTORICAL AVERAGE QUEUE SIZE FOR EACH MACHINE WHEN ONLY PRODUCT A IS IN PRODUCTION ON FACTORY FLOOR

<u>Machine</u>	<u>Average Queue Size Lots or Boats of Product A</u>
1	4
3	4
4	4.5
12	5
19	5.5
22	5
29	3
30	4.4
32	4
34	2
60	3.5
65	5
67	4.5

68	5
73	2
74	5
80	3
93	2
125	4.5
130	3

EXAMPLE 4

Table IV sets forth the historical average queue size for each machine utilized when Products A and B are simultaneously in production on a factory floor and when at least some of the machines are utilize to process both Product A and Product B.

TABLE IV

HISTORICAL AVERAGE QUEUE SIZE FOR EACH MACHINE WHEN PRODUCTS A
AND B ARE SIMULTANEOUSLY IN PRODUCTION ON THE FACTORY FLOOR

<u>Machine</u>	<u>Average Queue Size Lots or Boats of Product A or B</u>
1	4
3	4
4	5.5
12	4.5
19	5
22	5
29	3.5
30	3.0
32	4
34	2.5
60	3
61	4
65	5
67	4
68	5
69	4
73	2.5
74	4.5
80	3
93	2
125	4
130	3

EXAMPLE 5

In this Example, "One Step Ahead MIVP" is utilized to facilitate the processing of a single Product A on a factory floor in accordance with the process flow set forth in Table I in Example 1. Each Product A visits, or "re-enters", several machines more than once.

In this Example, the decisions made by Machine 125 are detailed. As would be appreciated by those of skill in the art, the same process can be utilized by other machines utilized to process Product A.

Assumptions:

- *** One Step Ahead MIVP is utilized.
- ***Only a single product, Product A, is being processed.
- ***A "lot" of Product A comprises one or more of Product A in a boat or other container used to transport Product A.
- ***A "queue" for a machine, say Machine 125 (See Table 1), includes lots of Product A which have finished being processed by a preceding machine or production process step and are ready to be processed by Machine 125 .
- *** The "present queue size" is the size of a queue for a machine or production process step at the time a machine, say Machine 125 , is ready to receive and process another lot of Product A.
- *** The "historical queue size" for each machine or production process step is the average queue size over a selected period of time prior to the present instant or point in time. The selected period of time can be a day, a week, a month, etc.
- ***At each production flow step at least one machine is used to process Product A.

***Machine 125 is an expensive, critical piece of machinery, which is used extensively and requires constant maintenance.

***The objective is to determine which "lot" of Product A will next be processed by Machine 125 .

*** When Machine 125 is available for processing in Step 4, 25, or 27 the following "lots" of Product A are ready for processing by Machine 125 (See Table I):

A lot which has just been processed in Step 3 and is ready for Step 4.

A lot which has just been processed in Step 24 and is ready for Step 25 .

A lot which has just been processed in Step 26 and is ready for Step 27 .

See Table I.

***The following rules determine which lots of Product A will be selected by Machine 125 at each instant in time when Machine 125 is next ready to accept a lot of Product A for processing:

First priority (I) is where (a) the present queue size of Machine 125 is above its historical average (i.e., the present queue size of Machine 125 is greater than its historical average) and (b) the present queue for the Machine used in the process step immediately following Step 4, 25, 27, as the case may be, is below its historical average (i.e., the present queue size for the following process step is less than its

historical average). In Table I, Machines 29, 1, 67, respectively, are used in the process Steps 5, 26, 28 which immediately follow the use of Machine 125 in Steps 4, 25, 27.

Second priority (II) is where (a) the present queue size of Machine 125 is above its historical average and (b) the present queue size for the Machine used in the process step following the use of Machine 125 is also above its historical average.

Third priority (III) is where (a) the present queue size of Machine 125 is below its historical average and (b) the present queue size of the Machine used in the process step following the use of Machine 125 is also below its historical average.

Fourth priority (IV) is where (a) the present queue size of Machine 125 is below its historical average and (b) the present queue size of the Machine used in the process step following the use of Machine 125 is, in contrast, above its historical average.

***Each time Machine 125 becomes available, at that instant the present queue size of Machine 125 for each step (i.e., Steps 4, 25, 27 in Table I) in which a finished lot of Product A has arrived from a preceding process step (i.e., Steps 3, 24, 26, respectively, in Table I) is reviewed according to the priorities set forth above, i.e. in each instance where a lot of Product A has finished processing at another machine or production process step and is in the present queue of Machine 125 and ready to be processed by Machine 125, Machine 125 reviews its own present queue size and the queue size of the Machine used in the succeeding process step and assigns a priority to that lot of Product A.

***Table V below illustrates the actual and historical queue sizes of Machines 125, 29, 1, and 67 at 9:20 a.m. when Machine 125 has finished processing a lot of Product A and is ready to select another lot for processing.

TABLE V

HISTORICAL AVERAGE QUEUE SIZE AND ACTUAL QUEUE SIZE AT 9:20 A.M.
FOR SELECTED MACHINES USED IN PRODUCTION OF PRODUCT A

<u>Machine</u>	<u>Historical Average Queue Size (Lots or Boats)</u>	<u>Actual Queue Size at 9:20 A.M. (Lots or Boats)</u>
125	4.5	5.0
29	3	2.0
1	4	5.0
67	4.5	1.0

The actual queue size for each machine on the factory floor at 9:20 a.m. is determined when the system and apparatus of the invention is utilized for each machine on the factory floor. As would be appreciated by those of skill in the art, for purposes of this Example only the machines listed in Table V are necessary.

At 9:20 a.m., the five (5) lots in the queue of Machine 125 include two lots which arrived from Step 3 (Machine 12), one lot which arrived from Step 24 (Machine 22), and two lots which arrived from Step 26 (Machine 1).

Since at 9:20 a.m. the number of lots in the queue of Machine 125 is above the historical average of Machine 125 and the number of lots in the queue of Machine 29 is below the historical average of Machine 29, the lots of Product A which are ready at 9:20 a.m. to be processed by Machine 125 in Step 4 and to travel on to Machine 29 in Step 5 meet the 1st Priority criteria set forth above.

Since at 9:20 a.m. the number of lots in the queue of Machine 125 is above the historical average of Machine 125 and the number of lots in the queue of Machine 1 is

002069-090700

above the historical average of Machine 1, the lot of Product A which is ready at 9:20 a.m. to be processed by Machine 125 in Step 25 and to travel on to Machine 1 in Step 26 meet the 2nd Priority criteria set forth above.

Since at 9:20 a.m. the number of lots in the queue of Machine 125 is above the historical average of Machine 125 and the number of lots in the queue of Machine 67 is below the historical average of Machine 67, the lots of Product A which are ready at 9:20 a.m. to be processed by Machine 125 in Step 27 and to travel on to Machine 67 in Step 28 meet the 1st Priority criteria set forth above.

At 9:20 a.m., none of the lots of Product A in the queue of machine 125 meet the 3rd Priority or 4th Priority criteria.

Since the lots of Product A ready to travel to Machine 29 (Step 5 in Table I) or 67 (Step 28 in Table I) both meet the 1st Priority criteria, Machine 125 utilizes an additional criteria to select which lot of Product A will be selected and processed by Machine 125. By way of example and not limitation, one such criteria can be that the lot of A which first entered and is in the queue of Machine 125 to be processed by Machine 125 and travel on to Machine 29 or 67 is selected over other lots of Product A which also entered and are in the queue of Machine 125 to be processed by Machine 125 and travel to Machine 29 or 67 (First-In-First-Out, FIFO).

***Table VI below illustrates the actual and historical queue sizes of Machines 125, 29, 1, and 67 at 9:31 a.m. when Machine 125 has finished processing the lot selected at 9:20 a.m. and is ready to select another lot for processing.

TABLE VI
HISTORICAL AVERAGE QUEUE SIZE AND ACTUAL QUEUE SIZE AT 9:31 A.M.
FOR SELECTED MACHINES USED IN PRODUCTION OF PRODUCT A

<u>Machine</u>	<u>Historical Average Queue Size (Lots or Boats)</u>	<u>Actual Queue Size at 9:31 A.M. (Lots or Boats)</u>
125	4.5	4.0
29	3	4.0
1	4	3.0
67	4.5	6.0

The actual queue size for each machine on the factory floor at 9:31 a.m. is determined when the system and apparatus of the invention is utilized for each machine on the factory floor. As would be appreciated by those of skill in the art, for purposes of this Example only the machines listed in Table VI are necessary.

At 9:31 a.m., the four (4) lots in the queue of Machine 125 include two lots which arrived from Step 3 (Machine 12), one lot which arrived from Step 24 (Machine 22), and one lot which arrived from Step 26 (Machine 1).

Since at 9:31 a.m. the number of lots in the queue of Machine 125 is below the historical average of Machine 125 and the number of lots in the queue of Machine 29 is above the historical average of Machine 29, the lots of Product A which are ready at 9:31 a.m. to be processed by Machine 125 in Step 4 and to travel on to Machine 29 in Step 5 meet the 4th Priority criteria set forth above.

Since at 9:31 a.m. the number of lots in the queue of Machine 125 is below the historical average of Machine 125 and the number of lots in the queue of Machine 1 is below the historical average of Machine 1, the lot of Product A which is ready at 9:31 a.m. to be processed by Machine 125 in Step 25 and to travel on to Machine 1 in Step 26 meets the 3rd Priority criteria set forth above.

Since at 9:31 a.m. the number of lots in the queue of Machine 125 is below the historical average of Machine 125 and the number of lots in the queue of Machine 67 is above the historical average of Machine 67, the lot of Product A which is ready at 9:31 a.m.

to be processed by Machine 125 in Step 27 and to travel on to Machine 67 in Step 28 meets the 4th Priority criteria set forth above.

At 9:31 a.m., none of the lots of Product A in the queue of Machine 125 meet the 1st priority or 2nd priority criteria.

Since the lot or lots of Product A, which will travel to Machine 1 for processing (after being processed by Machine 125) meet the 3rd Priority criteria, Machine 125 selects this lot or lots for processing. If there are two or more lots of Product A, each having equivalent priority, which will be processed by Machine 1 after being processed by Machine 125, Machine 125 utilizes an additional criteria to select which lot of Product A will be selected and processed by Machine 125. By way of example and not limitation, one such criteria can be that the lot of A which first entered and is in the queue of Machine 125 to be processed by Machine 125 and travel on to Machine 1 is selected over other lots of Product A which also entered and are in the queue of Machine 125 to be processed by Machine 125 and travel to Machine 1 (First-in-First-Out).

EXAMPLE 6

In this Example, "One Step Ahead MIVP" is utilized to facilitate the processing of two Products A and B on a factory floor in accordance with the process flows set forth in Tables I and II in Examples 1 and 2. Each Product A and B visits, or "re-enters", several machines more than once during its process flow.

In this Example, the decisions made by Machine 125 are detailed. As would be appreciated by those of skill in the art, the same decision-making process can be utilized (1) by each of the other machines utilized to process Products A and B, and (2) when three or more products are being simultaneously processed on the factory floor and each product is processed by a machine which utilizes a machine also utilized by at least one of the other products being processed.

Each Product A and B has a different sequence of processing steps as shown by Tables I and II in Examples I and II. Each Product A and B visits at least one machine on the factory floor two or more times during processing. Products A and B typically visits two or more times during processing each of two or more machines on the factory floor.

Assumptions:

***One Step Ahead MIVP is utilized.

***Two products, Product A and Product B, are being processed.

***A "lot" of Product A comprises one or more of Product A in a boat or other container used to transport Product A.

***A "lot" of Product B comprises one or more of Product B in a boat or other container used to transport Product B.

***A "queue" for a machine, say Machine 125, includes lots of Product A and/or Product B which have finished processing by a preceding machine or production flow step and are ready to be processed by Machine 125.

***The "present queue size" is the size of a queue for a machine or production process step at the instant in time a machine, say Machine 125, is ready to receive and process another lot of Product A or B. The present queue size of a machine includes all lots of Product A or B that are ready to be processed by the machine.

***At each production flow step at least one machine is used to process Product A or Product B. The processing of Product B may include machines not used during the processing of Product A, and vice-versa.

Parameter	Value
α	0.05
β	0.05
γ	0.05
δ	0.05
ϵ	0.05
ζ	0.05
η	0.05
θ	0.05
ι	0.05
κ	0.05
λ	0.05
μ	0.05
ν	0.05
ξ	0.05
\omicron	0.05
π	0.05
ρ	0.05
σ	0.05
τ	0.05
υ	0.05
ϕ	0.05
χ	0.05
ψ	0.05
ω	0.05
Ω	0.05
Θ	0.05
Φ	0.05
Ψ	0.05
Υ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05
Π	0.05
Λ	0.05
Γ	0.05
Δ	0.05
Σ	0.05

A lot which has just been processed in Step 3 and is ready for Step 4

A lot which has just been processed in Step 24 and is ready for Step 25 .

A lot which has just been processed in Step 26 and is ready for Step 27 .

A lot which has just been processed in Step 5 and is ready for Step 6.

A lot which has just been processed in Step 24 and is ready for Step 25.

A lot which has just been processed in Step 26 and is ready for Step 27.

***The following rules determine which lot of Product A or Product B will be selected by Machine 125 from its queue at each instant in time when Machine 125 is next ready to accept a lot of Product A or Product B for processing:

First priority (I) is where (a) the present queue size of Machine 125 is above its historical average (i.e., the present queue size of Machine 125 is greater than its historical average) and (b) the present queue for the Machine used in the process step immediately following Step 4, 25, 27 (for Product A in Table I) or immediately following Step 6, 25, 27 (for Product B in Table II), as the case may be, is below its historical average (i.e., the present queue size for the following process step is less than its historical average). In Table I, Machines 29, 1, 67, respectively, are used in the process Steps 5, 26, 28 that immediately follow the use of Machine 125 in Steps 4, 25, 27. In Table II, Machines 73, 19, 73 are used in process Steps 7, 26, 28 that immediately follow the use of Machine 125 in Steps 6, 25, 27.

Second priority (II) is where (a) the present queue size of Machine 125 is above its historical average and (b) the present queue size for the Machine used in the process step for Product A or Product B, as the case may be, following the use of Machine 125 is also above its historical average.

Third priority (III) is where (a) the present queue size of Machine 125

is below its historical average and (b) the present queue size of the Machine used in the process step for Product A or Product B, as the case may be, following the use of Machine 125 is also below its historical average.

Fourth priority (IV) is where (a) the present queue size of Machine 125 is below its historical average and (b) the present queue size of the Machine used in the process step for Product A or Product B, as the case may be, following the use of Machine 125 is, in contrast, above its historical average.

***Each time Machine 125 becomes available to process a lot of Product A or Product B, at that instant the present queue size of Machine 125 for each step (i.e., Steps 4, 25, 27 in Table I and Steps 6, 25, 27 in Table II) in which a finished lot of Product A or B has arrived from a preceding process step (i.e., Steps 3, 24, 26, respectively, in Table I and Steps 5, 24, 26 in Table II) is reviewed according to the priorities set forth above. This means that in each instance where a lot of Product A or B has finished processing at another machine (process step) and is in the present queue of Machine 125 Machine and ready to be processed by Machine 125, Machine 125 reviews its own present queue size and the present queue size of the Machine to be used in the succeeding process step and assigns a priority to that lot of Product A or Product B.

If a First Priority (I) Product A lot or B lot is available, it is chosen by Machine 125 for processing. If two or more First Priority (I) Product A or Product B lots are available, only one of the lots is chosen based on selected criteria. By way of example, and not limitation, one such criteria used to determine which First Priority (I) lot is chosen can be that the

processing a lot of Product A or Product B and is ready to select another lot for processing.

TABLE VII

HISTORICAL AVERAGE QUEUE SIZE AND ACTUAL QUEUE SIZE AT 9:20 A.M.
FOR SELECTED MACHINES USED IN PRODUCTION
OF PRODUCT A AND PRODUCT B

<u>Machine</u>	<u>Historical Average Queue Size (Lots or Boats of Product A or B)</u>	<u>Actual Queue Size at 9:20 A.M. (Lots or Boats)</u>
125	4	6.0
29	3.5	2.0
1	4	5.0
67	4	1.0
19	5	6.0
73	2.5	8.0

The actual queue size for each machine on the factory floor at 9:20 a.m. is determined when the system and apparatus of the invention is utilized for each machine on the factory floor. As would be appreciated by those of skill in the art, for purposes of this Example only the machines listed in Table VII are necessary.

At 9:20 a.m., the six (6) lots in the queue of Machine 125 include one lot of Product A which arrived from Step 3 in Table I (i.e., arrived after being processed by Machine 12), one lot of Product A which arrived from Step 24 in Table I (i.e., arrived after being processed by Machine 22), one lot of Product A which arrived from Step 26 in Table I (i.e., arrived after being processed by Machine 1), one lot of Product B which arrived from Step 5 in Table II (i.e., arrived after being processed by Machine 19), one lot of Product B which arrived from Step 24 in Table II (i.e., arrived after being processed by Machine 22), and one lot of Product B which arrived from Step 26 in Table II (i.e., arrived after being processed by Machine 19).

Since at 9:20 a.m. the number of lots in the queue of Machine 125 is above the historical average of Machine 125 and the number of lots in the queue of Machine 29 is

below its historical average of Machine 29, the lot of Product A which is in the queue of and ready at 9:20 a.m. to be processed by Machine 125 in Step 4 and to travel on to Machine 29 in Step 5 (Table I) meets the 1st Priority criteria set forth above.

Since at 9:20 a.m. the number of lots in the queue of Machine 125 is above the historical average of Machine 125 and the number of lots in the queue of Machine 1 is above the historical average of Machine 1, the lot of Product A which is in the queue of and ready at 9:20 a.m. to be processed by Machine 125 in Step 25 and to travel on to Machine 1 in Step 26 meets the 2nd Priority criteria set forth above.

Since at 9:20 a.m. the number of lots in the queue of Machine 125 is above the historical average of Machine 125 and the number of lots in the queue of Machine 67 is below the historical average of Machine 67, the lot of Product A which is in the queue of and ready at 9:20 a.m. to be processed by Machine 125 in Step 27 and to travel on to Machine 67 in Step 28 meets the 1st Priority criteria set forth above.

At 9:20 a.m., none of the lots of Product A in the queue of machine 125 meet the 3rd Priority or 4th Priority criteria.

Since at 9:20 a.m. the number of lots in the queue of Machine 125 is above the historical average of Machine 125 and the number of lots in the queue of Machine 74 is above its historical average, the lot of Product B which is in the queue of and ready at 9:20 a.m. to be processed by Machine 125 in Step 6 (Table II) and to travel on to Machine 73 in Step 7 (Table II) after the visual inspect in Step 7 meets the 2nd Priority criteria set forth above.

Since at 9:20 a.m. the number of lots in the queue of Machine 125 is above the historical average of Machine 125 and the number of lots in the queue of Machine 19 is above the historical average of Machine 19, the lot of Product B which is in the queue of and ready at 9:20 a.m. to be processed by Machine 125 in Step 25 (Table II) and to travel on to Machine 19 in Step 26 (Table II) meets the 2nd Priority criteria set forth above.

002060" 80275960

Since at 9:20 a.m. the number of lots in the queue of Machine 125 is above the historical average of Machine 125 and the number of lots in the queue of Machine 74 is above the historical average of Machine 74, the lot of Product B which is in the queue of and ready at 9:20 a.m. to be processed by Machine 125 in Step 27 (Table II) and to travel on to Machine 74 in Step 29 (Table II) meets the 2nd Priority criteria set forth above.

At 9:20 a.m., none of the lots of Product A in the queue of machine 125 meet the 1st, 3rd, or 4th Priority criteria.

Since the lots of Product A ready to travel to Machine 29 or 67 (Table I) both meet the 1st Priority criteria, Machine 125 utilizes an additional criteria to select which lot of Product A will be selected and processed by Machine 125. By way of example and not limitation, one such criteria can be that the lot of A which first entered and is in the queue of Machine 125 to be processed by Machine 125 and travel on to Machine 29 or 67 is selected over other lots of Product A which also entered and are in the queue of Machine 125 to be processed by Machine 125 and travel to Machine 29 or 67 (First-In-First-Out, FIFO).

***Table VIII illustrates the actual and historical queue sizes of Machines 125, 29, 1 (Table I) and Machines 19 and 73 (Table II) at 9:31 a.m. when Machine 125 has finished processing the lot selected at 9:20 a.m. and is ready to select another lot for processing.

TABLE VIII

HISTORICAL AVERAGE QUEUE SIZE AND QUEUE SIZE AT 9:31 A.M. FOR
SELECTED MACHINES USED IN PRODUCTION OF PRODUCT A and PRODUCT B

<u>Machine</u>	<u>Historical Average Queue Size (Lots or Boats of Product A or B)</u>	<u>Actual Queue Size at 9:31 A.M. (Lots or Boats)</u>
125	4	5.0
29	3.5	4.5

1	4	3.0
67	4	6.0
19	5	2.0
73	2.5	6.0

The actual queue size for each machine on the factory floor at 9:31 a.m. is determined when the system and apparatus of the invention is utilized for each machine on the factory floor. As would be appreciated by those of skill in the art, for purposes of this Example only the machines listed in Table VIII are necessary.

At 9:31 a.m., the five (5) lots in the queue of Machine 125 include one lot of Product A which arrived from Step 3 in Table I (i.e., arrived after being processed by Machine 12), one lot of Product A which arrived from Step 24 in Table I (i.e., arrived after being processed by Machine 22), one lot of Product B which arrived from Step 5 in Table II (i.e., arrived after being processed by Machine 19), one lot of Product B which arrived from Step 24 in Table II (i.e., arrived after being processed by Machine 22), and one lot of Product B which arrived from Step 26 in Table II (i.e., arrived after being processed by Machine 19).

Since at 9:31 a.m. the number of lots in the queue of Machine 125 is above the historical average of Machine 125 and the number of lots in the queue of Machine 29 is above the historical average of Machine 29, the lot or lots of Product A which are ready at 9:31 a.m. to be processed by Machine 125 in Step 4 and to travel on to Machine 29 in Step 5 meet the 2nd Priority criteria set forth above.

Since at 9:31 a.m. the number of lots in the queue of Machine 125 is above the historical average of Machine 125 and the number of lots in the queue of Machine 1 is below the historical average of Machine 1, the lot or lots of Product A which are ready at 9:31 a.m. to be processed by Machine 125 in Step 25 and to travel on to Machine 1 in Step 26 meet the 1st Priority criteria set forth above.

Since at 9:31 a.m. the number of lots in the queue of Machine 125 is above the historical average of Machine 125 and the number of lots in the queue of Machine 67 is

above the historical average of Machine 67, the lot or lots of Product A which are ready at 9:31 a.m. to be processed by Machine 125 in Step 27 and to travel on to Machine 67 in Step 28 meet the 2nd Priority criteria set forth above.

At 9:31 a.m., none of the lots of Product A in the queue of Machine 125 meet the 3rd or 4th priority criteria.

Since at 9:31 a.m. the number of lots in the queue of Machine 125 is above the historical average of Machine 125 and the number of lots in the queue of Machine 73 is above its historical average, the lot of Product B which is in the queue of and ready at 9:31 a.m. to be processed by Machine 125 in Step 6 (Table II) and to travel on to Machine 73 in Step 6 meets the 2nd Priority criteria set forth above.

Since at 9:31 a.m. the number of lots in the queue of Machine 125 is above the historical average of Machine 125 and the number of lots in the queue of Machine 19 is below the historical average of Machine 19, the lot of Product B which is in the queue of and ready at 9:31 a.m. to be processed by Machine 125 in Step 25 (Table II) and to travel on to Machine 19 in Step 26 (Table II) meets the 1st Priority criteria set forth above.

Since at 9:31 a.m. the number of lots in the queue of Machine 125 is above the historical average of Machine 125 and the number of lots in the queue of Machine 74 is above the historical average of Machine 74, the lot of Product B which is in the queue of and ready at 9:31 a.m. to be processed by Machine 125 in Step 27 (Table II) and to travel on to Machine 73 in Step 28 (Table II) meets the 2nd Priority criteria set forth above.

At 9:31 a.m., none of the lots of Product A or of Product B in the queue of machine 125 meet the 3rd or 4th Priority criteria.

Since the lot of Product A which will travel to Machine 1 for processing (after being processed by Machine 125 in Step 25 of Table I) meets the 1st Priority criteria, and since the lot of Product B which will travel to Machine 19 for processing (after being processed

by Machine 125 in Step 25 of Table II), Machine 125 selects one of these two “1st Priority” lots for processing. Machine 125 utilizes an additional criteria to select either the lot of Product A or Product B will be selected and processed by Machine 125. By way of example and not limitation, one such criteria can be that the lot which first entered and is in the queue of Machine 125 to be processed by Machine 125 is selected over lot which entered the queue of Machine 125 at a later time (First-In-First-Out, FIFO).

EXAMPLE 7

In this Example, “N Step Ahead MIVP” is utilized to facilitate the processing of lots of a Product A on a factory floor in accordance with the process flows set forth in Table I in Examples 1. Each lot of Product A visits, or “re-enters”, several machines more than once.

In this Example, the decisions made by Machine 125 are detailed. As would be appreciated by those of skill in the art, the same decision-making process can be utilized by each of the other machines utilized to process Product A.

Assumptions:

***N-Step Ahead MIVP is utilized.

***N can be from two to ten. For this example, it is assumed N=2.

***A “queue” for a machine, say Machine 125 (See Table I in Example 1), includes lots of Product A which have finished processing by a preceding machine or production flow step and are ready to be processed by Machine 125.

***The “present queue size” is the size of a queue for a machine or production process step at the time a machine, say Machine 125, is ready to receive and process another lot of Product A.

A lot which has just been processed in Step 26 and is ready for Step 27 .

See Table I.

***The following rules determine which lots of Product A will be selected by Machine 125 at each instant in time when Machine 125 is next ready to accept a lot of Product A for processing:

First priority (I) is where (a) the present queue size of Machine 125 is above its historical average (i.e., the present queue size of Machine 125 is greater than its historical average) and (b) the present average of the following queues for the N machines or process steps ahead (N=2 in this example, so it is the present average of the queues for the two succeeding processing machines or process steps) used to Process a lot of Product A immediately after Step 4, 25, 27, as the case may be, is below its historical average (i.e., the present average queue size for the two process steps following processing by Machine 125 is less than the historical average queue size of the two process steps). The historical average is determined by adding together the present queue size of each of N machines or process steps and by dividing the resulting sum by N. For example, if a machine 74 has a historical queue consisting of eight (8) lots of Product A and/or B and the next succeeding machine 60 has a historical queue of four (4) lots of Product A, then the average historical queue size equals $(8 + 4)/2 = 6$ lots of Product A. The present average queue size is determined by adding together the present queue size of each of N machines or process steps and by dividing the resulting sum by N. For example, if a machine 74 has a present queue size consisting of four (4) lots of Product A the next succeeding machine 60 used to process Product A has a present queue size of six (6) lots of Product A, then the average

present queue size equals $(4 + 6)/2 = 5$ lots of Product A.

In Table I, Machines 29, 1, 67, respectively, are used in the process Steps 5, 26, 28 that immediately follow the use of Machine 125 in Steps 4, 25, 27.

Second priority (II) is where (a) the present queue size of Machine 125 is above its historical average and (b) the present average queue size for the N Machines used in the process step following the use of Machine 125 is also above the historical average queue size for the N Machines.

Third priority (III) is where (a) the present queue size of Machine 125 is below its historical average and (b) the present average queue size of the N Machines used in the process steps following the use of Machine 125 is also below the historical average queue size for the N Machines.

Fourth priority (IV) is where (a) the present queue size of Machine 125 is below its historical average and (b) the present queue size of the N Machine used in the process steps following the use of Machine 125 is, in contrast, above the historical average queue size for the N Machines.

***Each time Machine 125 becomes available, at that instant the present queue size of Machine 125 for each step (i.e., Steps 4, 25, 27 in Table I) in which a finished lot of Product A has arrived from a preceding process step (i.e., Steps 3, 24, 26, respectively, in Table I) is reviewed according to the priorities set forth above, i.e. in each instance where a lot of Product A has finished processing at another machine or production process step preceding Machine 125 and is

now in the present queue of Machine 125 and ready to be processed by Machine 125, Machine 125

- (a) compares its own present queue size to its historical average queue size;
- (b) compares the present average queue size and historical average queue size of the N Machines to be used in the succeeding process steps for that lot of Product A; and,
- (c) assigns a priority to that lot of Product A based on whether the present queue sizes of Machine 125 and of the N Machines following Machine 125 are greater or less than the historical queue sizes of the same.

If a First Priority (I) Product A lot is available, it is chosen by Machine 125 for processing. If two or more First Priority (I) Product A lots are available, only one of the lots is chosen based on selected criteria. By way of example, and not limitation, one such criteria used to determine which First Priority (I) lot is chosen can be that the Product A lot which first entered the queue (i.e., entered the Machine 125 queue before the other Product A lot or lots) is selected by Machine 125 for processing (First-In-First-Out, FIFO). Another such criteria might be that the Product A lot selected by Machine 125 is the one, which has the earliest due date for shipping to customer (Due-Date-First, DDF).

If a First Priority (I) Product A lot is not available, then a Second Priority (II) Product A lot is available, then the Second Priority (II) lot is chosen. If two or more Second Priority (II) lots are available, only one of the lots is chosen for processing by Machine 125 based on selected criteria.

If neither a First (I) or Second Priority (II) Product A lot is available, and a Third Priority (III) Product A lot is available, then the Third Priority (III) lot is chosen. If two or more Third Priority (III) lots are available, only one of the lots is chosen for processing by Machine 1 based on selected criteria.

If a First (I), Second (II), or Third Priority (III) Product A lot is not available, then a Fourth Priority (IV) Product A lot is chosen. If two or more Fourth (IV) Priority lots are available, only one of the lots is chosen for processing by Machine 125 based on selected criteria.

***Tables IX and X below illustrate (1) the actual and historical queue sizes of Machines 125, 29, 1, and 67 at 9:20 a.m. when Machine 125 has finished processing a lot of Product A and is ready to select another lot for processing, and (2) the historical average queue sizes and present average queue sizes for machine pairs (since N=2).

TABLE IX

HISTORICAL AVERAGE QUEUE SIZE AND ACTUAL QUEUE SIZE AT 9:20 A.M.
FOR SELECTED MACHINES USED IN PRODUCTION OF PRODUCT A

<u>Machine</u>	<u>Historical Average Queue Size (Lots or Boats)</u>	<u>Actual Queue Size at 9:20 A.M. (Lots or Boats)</u>
125	4.5	5.0
29	3	2.0
30	4.4	1.0
1	4	5.0
125	4.5	5.0
67	4.5	1.0
73	2	0

At 9:20 a.m., the five (5) lots in the queue of Machine 125 include two lots that

arrived from Step 3 (Machine 12), one lot that arrived from Step 24 (Machine 22), and two lots which arrived from Step 26 (Machine 1).

TABLE X

HISTORICAL AVERAGE QUEUE SIZE AND PRESENT AVERAGE QUEUE SIZE AT 9:20 A.M. FOR SELECTED N (N=2) MACHINE PAIRS USED IN PRODUCTION OF PRODUCT A IN SUCCESSIVE STEPS IN TABLE I

N Machine Pair	Historical Average Queue Size	Present Average Queue Size
29 (Step 5) & 30 (Step 6)	$(3 + 4.4)/2 = 3.7$	$(2.0 + 1.0)/2 = 1.5$
1 (Step 26) & 125 (Step 27)	$(4 + 4.5)/2 = 4.25$	$(5.0 + 5.0)/2 = 5.0$
67 (Step 28) & 73 (Step 29 last Machine step)	$(4.5 + 2)/2 = 3.25$	$(1.0 + 0)/2 = 0.5$

The actual queue size and present average queue size for each machine or N Machines, as the case may be, on the factory floor at 9:20 a.m. can, when the system and apparatus of the invention is utilized, be determined for each machine or N machines on the factory floor. As would be appreciated by those of skill in the art, for purposes of this Example only the machines listed in Tables IX and X are necessary.

If N=3, then the queues for the three machines subsequent to Machine 125 would be averaged in Table X; if N=4, then the queues for the four machines subsequent to Machine 125 would be averaged; etc. Since in this Example 7 N=2, only the queues of the two machines subsequent to Machine 125 are averaged.

Since at 9:20 a.m. the actual queue size (5 lots—See Table IX) of Machine 125 is greater than the historical average queue size (4.5 lots—See Table IX) of Machine 125 and the present average size (1.5 lots—See Table X) of the queues of Machines 29 and 30 is below the historical average queue size (3.0 lots—See Table X) of Machines 29 and 30,

the lots of Product A which are ready at 9:20 a.m. to be processed by Machine 125 in Step 4 and to travel on to Machines 29 and 30 in Steps 5 and 6 meet the 1st Priority criteria set forth above.

Since at 9:20 a.m. the actual queue size (5 lots—See Table IX) of Machine 125 is above the historical average queue size (4.5 lots—See Table IX) of Machine 125 and the present average size (5.0 lots—See Table X) of the queues of Machines 1 and 125 is above the historical average queue size (4.25 lots—See Table X) of Machines 1 and 125, the lot of Product A which is ready at 9:20 a.m. to be processed by Machine 125 in Step 25 and to travel on to Machines 1 and 125 in Steps 26 and 27 meet the 2nd Priority criteria set forth above.

Since at 9:20 a.m. the actual queue size (5 lots—See Table IX) of Machine 125 is above the historical average queue size (4.5 lots—See Table IX) of Machine 125 and the present average size (0.5 lots—See Table X) of the queues of Machines 67 and 73 is below the historical average queue size (3.25 lots—See Table X) of Machines 67 and 73, the lots of Product A which are ready at 9:20 a.m. to be processed by Machine 125 in Step 27 and to travel on to Machines 67 and 73 in Steps 28 and 29 meet the 1st Priority criteria set forth above.

If there were no Step 29 in Table I and Step 28 were the last step listed in Table I, the Historical Average Queue Size of 3.25 lots and the Present Average Queue Size of 0.5 in Table X for the "N Machine Pair" including Machine 67 would be 4.5 and 1.0 respectively. In other words, if there are fewer than N Machines left in the processing of a lot of Product A then the N Machine calculation does not include N Machines, but only includes a number of machines less than N Machines.

At 9:20 a.m., none of the lots of Product A in the queue of machine 125 meet the 3rd Priority or 4th Priority criteria.

Since the lots of Product A ready to travel to Machine 29, 30 (Steps 5 and 6 in Table

l) or 67, 73 (Steps 28, 29 in Table I) both meet the 1st Priority criteria, Machine 125 utilizes an additional criteria to select which lot of Product A will be selected and processed by Machine 125. By way of example and not limitation, one such criteria can be that the lot of A which first entered and is in the queue of Machine 125 to be processed by Machine 125 and travel on to Machine 29 or 67 is selected over other lots of Product A which also entered and are in the queue of Machine 125 to be processed by Machine 125 and travel to Machine 29 or 67 (First-In-First-out, FIFO).

***Tables XI and XII below illustrate (1) the actual and historical queue sizes of Machines 125, 29, 1, and 67 at 9:31 a.m. when Machine 125 has finished processing a lot of Product A and is ready to select another lot for processing, and (2) the historical average queue sizes and present average queue sizes for machine pairs (since N=2).

HISTORICAL AVERAGE QUEUE SIZE AND ACTUAL QUEUE SIZE AT 9:31 A.M.
FOR SELECTED MACHINES USED IN PRODUCTION OF PRODUCT A

The actual queue size for each machine on the factory floor at 9:31 a.m. is, when the system and apparatus of the invention is utilized, determined for each machine on the factory floor. As would be appreciated by those of skill in the art, for purposes of this Example only the machines listed in Table XI are necessary.

At 9:31 a.m., the four (4) lots of Product A in the queue of Machine 125 include two lots which arrived from Step 3 (Machine 12), one lot which arrived from Step 24 (Machine 22), and one lot which arrived from Step 26 (Machine 1).

TABLE XII

HISTORICAL AVERAGE QUEUE SIZE AND PRESENT AVERAGE QUEUE SIZE AT 9:20 A.M. FOR SELECTED N (N=2) MACHINE PAIRS USED IN PRODUCTION OF PRODUCT A IN SUCCESSIVE STEPS IN TABLE I

N Machine Pair	Historical Average Queue Size	Present Average Queue Size
29 (Step 5) & 30 (Step 6)	$(3 + 4.4)/2 = 3.7$	$(2.0 + 4.0)/2 = 3.0$
1 (Step 26) & 125 (Step 27)	$(4 + 4.5)/2 = 4.25$	$(3.0 + 4.0)/2 = 3.5$
67 (Step 28) & 73 (Step 29 last Machine step)	$(4.5 + 2)/2 = 3.75$	$(6.0 + 0)/2 = 3.0$

Since at 9:31 a.m. the actual queue size (4 lots—See Table XI) of Machine 125 is less than the historical average queue size (4.5 lots—See Table XI) of Machine 125 and the present average size (3.0 lots—See Table XII) of the queues of Machines 29 and 30 is less than the historical average queue size (3.7 lots—See Table XII) of Machines 29 and 30, the lots of Product A which are ready at 9:31 a.m. to be processed by Machine 125 in Step 4 and to travel on to Machines 29 and 30 in Steps 5 and 6 meet the 3rd Priority criteria set forth above.

Since at 9:31 a.m. the actual queue size (4 lots—See Table XI) of Machine 125 is below the historical average queue size (4.5 lots—See Table XI) of Machine 125 and the present average size (3.5 lots—See Table XII) of the queues of Machines 1 and 125 is below the historical average queue size (4.25 lots—See Table XII) of Machines 1 and 125, the lot of Product A which is ready at 9:31 a.m. to be processed by Machine 125 in Step 25 and to travel on to Machines 1 and 125 in Steps 26 and 27 meet the 3rd Priority criteria set

forth above.

Since at 9:31 a.m. the actual queue size (4 lots—See Table XI) of Machine 125 is below the historical average queue size (4.5 lots—See Table XI) of Machine 125 and the present average size (3.0 lots—See Table XII) of the queues of Machines 67 and 73 is below the historical average queue size (3.75 lots—See Table XII) of Machines 67 and 73, the lots of Product A which are ready at 9:20 a.m. to be processed by Machine 125 in Step 27 and to travel on to Machines 67 and 73 in Steps 28 and 29 meet the 3rd Priority criteria set forth above.

If there were no Step 29 in Table I and Step 28 were the last step listed in Table I, the Historical Average Queue Size of 3.75 lots and the Present Average Queue Size of 3.0 in Table XII for the "N Machine Pair" including Machine 67 would be 4.5 and 6.0 respectively. In other words, if there are fewer than N Machines left in the processing of a lot of Product A then the N Machine calculation does not include N Machines, but only includes a number of machines less than N Machines.

At 9:31 a.m., none of the lots of Product A in the queue of machine 125 meet the 1st Priority, 2nd Priority or 4th Priority criteria.

Since the lot of Product A which is ready at 9:31 a.m. to be processed by Machine 125 in Steps 4, 25 and 27 traveling to Machines 29, 1 and 67, all meet the 3rd Priority, Machine 125 utilizes an additional criteria to select which lot of Product A will be selected and processed by Machine 125. By way of example and not limitation, one such criteria can be that the lot of A which first entered and is in the queue of Machine 125 to be processed by Machine 125 and travel on to Machine 29, 1 or 67 is selected over other lots of Product A which also entered and are in the queue of Machine 125 to be processed by Machine 125 and travel to Machine 29, 1 or 67 (First-In-First-out, FIFO).

EXAMPLE 8

In this Example, "N Step Ahead MIVP" is utilized to facilitate the processing of lots of Products A and B on a factory floor in accordance with the process flows set forth in Table I in Examples 1 and Table II in Example 2. Each lot of Product A or Product B visits, or "re-enters", several machines more than once.

In this Example, the decisions made by Machine 125 are detailed. As would be appreciated by those of skill in the art, the same decision-making process can be utilized by each of the other machines utilized to process Product A and Product B.

Assumptions:

***N-Step Ahead MIVP is utilized.

***N can be from two to ten. For this example, it is assumed $N=2$.

***A "queue" for a machine, say Machine 125 (See Table I in Example 1 and Table II in Example 2), includes lots of Product A which have finished processing by a preceding machine or production flow step and are ready to be processed by Machine 125.

***The "present queue size" is the size of a queue for a machine or production process step at the time a machine, say Machine 125, is ready to receive and process another lot of Product A or Product B.

***The "historical queue size" for each machine or production process step is the average queue size over a selected period of time prior to the present instant or point in time. The selected period of time can be a day, a week, a month, etc.

*** The N process steps include the next process steps immediately after the

process step in which a machine, for example Machine 125, is utilized.

***Two products, Products A and B, are being processed.

***A "lot" of Product A comprises one or more of Product A in a boat or other container used to transport Product A.

***A "lot" of Product B comprises one or more of Product B in a boat or other container used to transport Product B.

***At each production flow step at least one machine normally is used to process Product A or Product B.

***Machine 125 is an expensive, critical piece of machinery, which is used extensively and requires constant maintenance.

***The objective is to determine which "lot" of Product A or Product B will next be processed by Machine 125.

*** When Machine 125 is available for processing in Step 4, 25, or 27 the following "lots" of Product A are ready for processing by Machine 125 (See Table I):

A lot which has just been processed in Step 3 and is ready for Step 4

A lot which has just been processed in Step 24 and is ready for Step 25 .

A lot which has just been processed in Step 26 and is ready for Step 27 .

See Table I.

*** When Machine 125 is available for processing in Step 6, 25, or 27 the following "lots" of Product B are ready for processing by Machine 125 (See Table II):

A lot which has just been processed in Step 5 and is ready for Step 6

A lot which has just been processed in Step 24 and is ready for Step 25 .

A lot which has just been processed in Step 26 and is ready for Step 27 .

See Table II.

***The following rules determine which lot of Product A or Product B will be selected by Machine 125 at each instant in time when Machine 125 is next ready to accept a lot of Product A or Product B for processing:

First priority (I) is where (a) the present queue size of Machine 125 is above its historical average (i.e., the present queue size of Machine 125 is greater than its historical average) and (b) the present average of the queues for the N machines or process steps (N=2 in this example, so it is the present average of the queues for the two succeeding processing machines or process steps) used to process

(a) a lot of Product A immediately after Step 4, 25, 27, (per the process of Table I), or

(b) a lot of Product B immediately after Step 6, 25, 27, (per the process of Table II)

as the case may be, is below its historical average (i.e., the present

average queue size for the two process steps following processing by Machine 125 is less than the historical average queue size of the two process steps). The historical average queue size is determined by adding together the historical average queue size of each of the N machines or process steps and by dividing the resulting sum by N. For example, if a machine 74 has a historical average queue size consisting of eight (8) lots of Product A and/or B and the next succeeding machine 60 has a historical average queue size of four (4) lots of Product A and/or B, then the historical average queue size of the two machines 60, 74 together equals $(8 + 4)/2 = 6$ lots of Product A. The present average queue size is determined by adding together the present queue size of each of N machines or process steps and by dividing the resulting sum by N. For example, if a machine 74 has a present queue size consisting of four (4) lots of Product A and/or Product B, and the next succeeding machine 60 has a present queue size of six (6) lots of Products A and/or B, then the average present queue size equals $(4 + 6)/2 = 5$ lots.

In Table I, Machines 29, 30, 1, 125, 67, 73 are used in the process step pairs 5-6, 26-27, and 28-29 that immediately follow the use of Machine 125 in Steps 4, 25, 27.

In Table II, Machines 73, 74, 19, 125, 73, 74, are used in process step pairs 7-8, 26-27, 28-29 that immediately follow the use of Machine 125 in Steps 6, 25, 27.

Second priority (II) is where (a) the present queue size of Machine 125 is above its historical average and (b) the present average queue size for the N Machines used in the process step following the use of Machine 125 is also above the historical average queue size for the N Machines.

Third priority (III) is where (a) the present queue size of Machine 125 is below its historical average and (b) the present average queue size of the N Machines used in the process steps following the use of Machine 125 is also below the historical average queue size for the N Machines.

Fourth priority (IV) is where (a) the present queue size of Machine 125 is below its historical average and (b) the present queue size of the N Machine used in the process steps following the use of Machine 125 is, in contrast, above the historical average queue size for the N Machines.

***Each time Machine 125 becomes available, at that instant the present queue size of Machine 125 for each step (i.e., Steps 4, 25, 27 in Table I and Steps 6, 25, 27 in Table II) in which a finished lot of Product A or Product B has arrived from a preceding process step (i.e., Steps 3, 24, 26, respectively, in Table I and Steps 5, 24, 26 in Table II) is reviewed according to the priorities set forth above, i.e. in each instance where a lot of Product A or Product B has finished processing at another machine or production process step preceding Machine 125 and is now in the present queue of Machine 125 and ready to be processed by Machine 125, Machine 125

- (a) compares its own present queue size to its historical average queue size;
- (b) compares the present average queue size and historical average queue size of the N Machines to be used in the succeeding process steps for that lot of Product A or Product B; and,
- (c) assigns a priority to that lot of Product A or Product B

based on whether the present queue sizes of Machine 125 and of the N Machines following Machine 125 are greater or less than the historical queue sizes of the same.

If a First Priority (I) Product A or Product B lot is available, it is chosen by Machine 125 for processing. If two or more First Priority (I) Product A and/or Product B lots are available, only one of the lots is chosen based on selected criteria. By way of example, and not limitation, one such criteria used to determine which First Priority (I) lot is chosen can be that the Product A or Product B lot which first entered the queue (i.e., entered the Machine 125 queue before the other Product A lot or lots) is selected by Machine 125 for processing (First-In-First-Out, FIFO). Another such criteria might be that the Product A or Product B lot selected by Machine 125 is the one, which has the earliest due date for shipping to customer (Due-Date-First, DDF).

If a First Priority (I) Product A or Product B lot is not available, and a Second Priority (II) Product A or Product B lot is available, then the Second Priority (II) lot is chosen. If two or more Second Priority (II) lots are available, only one of the lots is chosen for processing by Machine 125 based on selected criteria.

If neither a First (I) or Second Priority (II) Product A or Product B lot is available, and a Third Priority (III) Product A or Product A lot is available, then the Third Priority (III) lot is chosen. If two or more Third Priority (III) lots are available, only one of the lots is chosen for processing by Machine 125 based on

selected criteria.

If a First (I), Second (II), or Third Priority (III) Product A or Product B lot is not available, then a Fourth Priority (IV) Product A or Product B lot is chosen. If two or more Fourth (IV) Priority lots are available, only one of the lots is chosen for processing by Machine 125 based on selected criteria.

***Tables XIII and XIV below illustrate (1) the actual and historical queue sizes of Machines 125 , 29 , 30 , 1, 67, 73, 74, 19 at 9:20 a.m. when Machine 125 has finished processing a lot of Product A or Product B and is ready to select another lot for processing, and (2) the historical average queue sizes and present average queue sizes for machine pairs (since N=2).

TABLE XIII

HISTORICAL AVERAGE QUEUE SIZE AND ACTUAL QUEUE SIZE AT 9:20 A.M.
FOR SELECTED MACHINES USED IN PRODUCTION OF PRODUCT A and
PRODUCT B

<u>Machine</u>	<u>Historical Average Queue Size</u> <u>(Lots or Boats in Product A or B)</u>	<u>Actual Queue Size</u> <u>at 9:20 A.M. (Lots or Boats)</u>
125	4	5.0
29	3.5	2.0
30	3	1.0
1	4	5.0
67	4	1.0
73	2.5	7.0
74	4.5	3.0
19	5	6.0

At 9:20 a.m., the five (5) lots in the queue of Machine 125 include one lot of Product A that arrived from Step 3 (Machine 12) in Table I, one lot of Product A that arrived from Step 24 (Machine 22) in Table I, one lot of Product B that arrived from Step 5 (Machine 19) in Table II, one lot of Product B that arrived from Step 24 (Machine

22) in Table II, and one lot of Product B that arrived from Step 26 (Machine 19) in Table II.

TABLE XIV

HISTORICAL AVERAGE QUEUE SIZE AND PRESENT AVERAGE QUEUE SIZE AT 9:20 A.M. FOR SELECTED N (N=2) MACHINE PAIRS USED IN PRODUCTION OF PRODUCT A AND PRODUCT B PER TABLES I AND II

N Machine Pair	Historical Average Queue Size	Present Average Queue Size
29 (Step 5) & 30 (Step 6) (Table I)	$(3.5 + 3)/2 = 3.25$	$(2.0 + 1.0)/2 = 1.5$
1 (Step 26) & 125 (Step 27) (Table I)	$(4 + 4)/2 = 4$	$(5.0 + 5.0)/2 = 5.0$
67 (Step 28) & 73 (Step 28) (Table I)	$(4 + 2.5)/2 = 3.25$	$(1.0 + 7.0)/2 = 4.0$
73 (Step 7) & 74 (Step 8) (Table II)	$(2.5 + 4.5)/2 = 3.5$	$(7.0 + 3.0)/2 = 5.0$
19 (Step 26) & 125 (Step 27) (Table II)	$(4 + 4)/2 = 4$	$(6.0 + 5.0)/2 = 5.5$
73 (Step 28) & 74 (Step 29) (Table II)	$(2.5 + 4.5)/2 = 3.5$	$(7.0 + 3.0)/2 = 5.0$

The actual queue size and present average queue size for each machine or N Machines, as the case may be, on the factory floor at 9:20 a.m. can, when the system and apparatus of the invention is utilized, be determined for each machine or N machines on the factory floor. As would be appreciated by those of skill in the art, for purposes of this Example only the machines listed in Tables XIII and XIV are necessary.

If N=3, then the queues for the three machines subsequent to Machine 125 would be averaged in Table X; if N=4, then the queues for the four machines subsequent to Machine 125 would be averaged; etc. Since in this Example 7 N=2, only the queues of the two machines subsequent to Machine 125 are averaged.

Since at 9:20 a.m. the actual queue size (5 lots—See Table XIII) of Machine 125 is greater than the historical average queue size (4.0 lots—See Table XIII) of Machine 125 and since the present average size (1.5 lots—See Table XIV) of the queues of Machines 29 and 30 is below the historical average queue size (3.25 lots—See Table XIII) of Machines 29 and 30, the lot of Product A which is ready at 9:20 a.m. to be processed by Machine 125 in Step 4 (Table I) and to travel on to Machines 29 and 30 in Steps 5 and 6 (Table I) meets the 1st Priority criteria set forth above.

Since at 9:20 a.m. the actual queue size (5 lots—See Table XIII) of Machine 125 is above the historical average queue size (4.0 lots—See Table XIII) of Machine 125 and since the present average size (5.0 lots—See Table XIV) of the queues of Machines 1 and 125 is above the historical average queue size (4.00 lots—See Table XIV) of Machines 1 and 125, the lot of Product A which is ready at 9:20 a.m. to be processed by Machine 125 in Step 25 (Table I) and to travel on to Machines 1 and 125 in Steps 26 and 27 (Table I) meets the 2nd Priority criteria set forth above.

Since at 9:20 a.m. the actual queue size (5 lots—See Table XIII) of Machine 125 is above the historical average queue size (4.0 lots—See Table XIII) of Machine 125 and since the present average size (4.0 lots—See Table XIV) of the queues of Machines 67 and 73 is above the historical average queue size (3.25 lots—See Table XIV) of Machines 1 and 125, the lot of Product A which is ready at 9:20 a.m. to be processed by Machine 125 in Step 28 (Table I) and to travel on to Machines 67 and 73 in Steps 28 and 29 (Table I) meets the 2nd Priority criteria set forth above.

Since at 9:20 a.m. the actual queue size (5 lots—See Table XIII) of Machine 125 is above the historical average queue size (4.0 lots—See Table XIII) of Machine 125 and the

present average size (5.0 lots—See Table XIV) of the queues of Machines 73 and 74 is greater than the historical average queue size (3.5 lots—See Table XIV) of Machines 73 and 74, the lot of Product B which is ready at 9:20 a.m. to be processed by Machine 125 in Step 6 and to travel on to Machines 73 and 74 in Steps 7 and 8 of Table II meets the 2nd Priority criteria set forth above.

Since at 9:20 a.m. the actual queue size (5 lots—See Table XIII) of Machine 125 is above the historical average queue size (4.0 lots—See Table XIII) of Machine 125 and the present average size (5.5 lots—See Table XIV) of the queues of Machines 19 and 125 is greater than the historical average queue size (4.0 lots—See Table XIV) of Machines 15 and 125, the lot of Product B which is ready at 9:20 a.m. to be processed by Machine 125 in Step 25 and to travel on to Machines 19 and 125 in Steps 26 and 27 (Table II) meets the 2nd Priority criteria set forth above.

Since at 9:20 a.m. the actual queue size (5 lots—See Table XIII) of Machine 125 is above the historical average queue size (4.0 lots—See Table XIII) of Machine 125 and the present average size (5.0 lots—See Table XIV) of the queues of Machines 73 and 74 is above than the historical average queue size (3.5 lots—See Table XIV) of Machines 73 and 74, the lot of Product B which is ready at 9:20 a.m. to be processed by Machine 125 in Step 27 and to travel on to Machines 73 and 74 in Steps 28 and 29 (Table II) meets the 2nd Priority criteria set forth above.

At 9:20 a.m., none of the lots of Product A or Product B in the queue of machine 125 meet the 3rd Priority or 4th Priority criteria.

Since the lot of Product A ready to travel from Machine 125 to Machines 29, 30 (Steps 5 and 6 in Table I) meet the 1st Priority criteria, Machine 125, Machine 125 selects Product A for processing at Step 4 to proceed to Step 6 Machine 29 after being processed.

EXAMPLE 9

One Product

Each Lot is in a Boat With a Computer "Book"

Each Processing Machine includes a Controller which Communicates with the "Book"

Assumptions:

***Only a single product, Product A, is being processed through a series of process steps.

***A "lot" of Product A comprises one or more of Product A in a boat used to transport Product A. A "book" is included in each boat and comprises a smart card or other device which includes a computer. The computer includes a radio frequency (RF) send/receive transmitter or includes other means for sending and receiving data.

***Machines 1 and 2 are used to process Product A contained in each boat.

***Each book includes the directions necessary to process Product A at Machines 1 and 2. After Product A is processed at a Machine 1 or 2, the book records that the processing by Machine 1 or 2 has been completed.

***Each Machine 1 and 2 includes a controller (computer RF reader) which communicates with the book in a boat. When a boat arrives at a Machine 1 or 2, the controller interrogates the book to determine whether the preceding process step has been completed.

***Each Machine includes a human operator or a mechanical Robot, here-in-after referred to as the operator.

Discussion

Scenario #1

A boat of Product A arrives at Machine 2. The Machine 2 controller interrogates the book in the boat. The book indicates that the next process step was to be performed by Machine 1 and has not yet been performed. The Machine 2 controller tells the operator to send the boat back to Machine 1.

Scenario #2

A boat of Product A arrives at Machine 2. The Machine 2 controller interrogates the book in the boat. The book indicates that the last process step was performed by Machine 1 and that the next process step is to be performed by Machine 2. The Machine 2 controller asks the book for instructions. The book tells the Machine 2 controller to process Product A:

- (1) In a formic acid bath.
- (2) At a temperature of 60 degrees C.
- (3) For three minutes.

The controller gives these instructions to the machine operator. The operator selects or causes Machine 2 to prepare a 60 degree C formic acid bath and immerses Product A in the bath for three minutes. After Product A is so processed, the Machine 2 controller informs the book. The book notes in its memory the start time and completion time and that Machine 2 completed its processing. The book can also, if desired, (1) erase from its memory the processing information for Machine 2, and (2) inform the controller of the next process step or machine which Product A must complete. The controller informs the machine operator of the next process step or machine. The machine operator directs the boat to the next such process step or machine.

Scenario #3

[illegible]

Scenario #4

EXAMPLE 10

In this Example, the decisions made by Machine 125 are detailed. As would be expected by those of skill in the art, the same decision-making process can be applied to each of the other machines utilized to process Product A and Product B.

***N-Step Ahead MIVP is utilized.

***N can be from two to ten. For this example, it is assumed $N=2$.

***A "queue" for a machine, say Machine 125 (See Table I in Example 1), includes lots of Product A which have finished processing by a preceding machine or production flow step and are ready to be processed by Machine 125.

***The "present queue size" is the size of a queue for a machine or production process step at the time a machine, say Machine 125, is ready to receive and process another lot of Product A or Product B.

***The "historical queue size" for each machine or production process step is the average queue size over a selected period of time prior to the present instant or point in time. The selected period of time can be a day, a week, a month, etc.

*** The N process steps include the next process steps immediately after the process step in which a machine, for example Machine 125, is utilized.

***Two products, Products A and B, are being processed.

***A "lot" of Product A comprises one or more of Product A in a boat or other container used to transport Product A. A "book" is included in each boat and comprises a smart card or other device which includes a computer. The computer includes a radio frequency (RF) send/receive transmitter or includes other means for sending and receiving data. The book also includes for Product A the process flow information set forth in Table I in Example 1. Further, the book also includes a break down of the cycle time for each Step 1, 2, 3, 4 ... n set forth in Example 1. The cycle time for each Step 1, 2, 3, 4, ... n includes the time T1 required to set up the machine, the time T2 required to load a boat into the machine, the time T3

Table 1. Demographic characteristics of the study population	
Age (years)	65.0 ± 10.0
Gender	
Male	100 (50.0%)
Female	100 (50.0%)
Education	
High school or less	100 (50.0%)
College or more	100 (50.0%)
Marital status	
Married	100 (50.0%)
Single	100 (50.0%)
Occupation	
Retired	100 (50.0%)
Unemployed	100 (50.0%)
Employed	100 (50.0%)
Income (USD/month)	
< 1000	100 (50.0%)
1000-2000	100 (50.0%)
> 2000	100 (50.0%)
Health status	
Good	100 (50.0%)
Fair	100 (50.0%)
Poor	100 (50.0%)
Comorbidities	
Hypertension	100 (50.0%)
Diabetes	100 (50.0%)
Cholesterol	100 (50.0%)
Arthritis	100 (50.0%)
Depression	100 (50.0%)
Medication	
Yes	100 (50.0%)
No	100 (50.0%)
Medication type	
Antidepressant	100 (50.0%)
Antipsychotic	100 (50.0%)
Mood stabilizer	100 (50.0%)
Other	100 (50.0%)
Medication duration (years)	
< 1	100 (50.0%)
1-5	100 (50.0%)
> 5	100 (50.0%)
Medication adherence	
Good	100 (50.0%)
Fair	100 (50.0%)
Poor	100 (50.0%)
Medication side effects	
Yes	100 (50.0%)
No	100 (50.0%)
Side effect type	
Weight gain	100 (50.0%)
Drowsiness	100 (50.0%)
Dry mouth	100 (50.0%)
Constipation	100 (50.0%)
Headache	100 (50.0%)
Other	100 (50.0%)
Medication satisfaction	
Yes	100 (50.0%)
No	100 (50.0%)
Satisfaction reason	
Effective	100 (50.0%)
Safe	100 (50.0%)
Easy to take	100 (50.0%)
Other	100 (50.0%)
Medication cost	
High	100 (50.0%)
Low	100 (50.0%)
Cost barrier	
Yes	100 (50.0%)
No	100 (50.0%)
Cost barrier reason	
Insurance	100 (50.0%)
Out of pocket	100 (50.0%)
Other	100 (50.0%)
Medication access	
Yes	100 (50.0%)
No	100 (50.0%)
Access barrier	
Transportation	100 (50.0%)
Hours of operation	100 (50.0%)
Other	100 (50.0%)
Medication knowledge	
High	100 (50.0%)
Low	100 (50.0%)
Knowledge barrier	
Yes	100 (50.0%)
No	100 (50.0%)
Knowledge barrier reason	
Lack of information	100 (50.0%)
Complex instructions	100 (50.0%)
Other	100 (50.0%)
Medication adherence barrier	
Yes	100 (50.0%)
No	100 (50.0%)
Adherence barrier reason	
Forgetfulness	100 (50.0%)
Lack of motivation	100 (50.0%)
Other	100 (50.0%)
Medication adherence support	
Yes	100 (50.0%)
No	100 (50.0%)
Support type	
Family	100 (50.0%)
Friends	100 (50.0%)
Healthcare provider	100 (50.0%)
Other	100 (50.0%)
Medication adherence outcome	
Good	100 (50.0%)
Fair	100 (50.0%)
Poor	100 (50.0%)
Medication adherence barrier	
Yes	100 (50.0%)
No	100 (50.0%)
Barrier reason	
Lack of information	100 (50.0%)
Complex instructions	100 (50.0%)
Other	100 (50.0%)
Medication adherence support	
Yes	100 (50.0%)
No	100 (50.0%)
Support type	
Family	100 (50.0%)
Friends	100 (50.0%)
Healthcare provider	100 (50.0%)
Other	100 (50.0%)
Medication adherence outcome	
Good	100 (50.0%)
Fair	100 (50.0%)
Poor	100 (50.0%)
Medication adherence barrier	
Yes	100 (50.0%)
No	100 (50.0%)
Barrier reason	
Lack of information	100 (50.0%)
Complex instructions	100 (50.0%)
Other	100 (50.0%)
Medication adherence support	
Yes	100 (50.0%)
No	100 (50.0%)
Support type	
Family	100 (50.0%)
Friends	100 (50.0%)
Healthcare provider	100 (50.0%)
Other	100 (50.0%)
Medication adherence outcome	
Good	100 (50.0%)
Fair	100 (50.0%)
Poor	100 (50.0%)
Medication adherence barrier	
Yes	100 (50.0%)

***Each book also includes any additional directions necessary to process Product A or Product B, as the case may be, at a particular machine.

-52-

00657208"090700
006090"8026560

***Each machine includes a human operator or a mechanical robot, hereinafter referred to as the operator.

***At each production flow step at least one machine normally is used to process Product A or Product B.

***Machine 125 is an expensive, critical piece of machinery, which is used extensively and requires constant maintenance.

***The objective is to determine which "lot" of Product A or Product B will next be processed by Machine 125.

*** When Machine 125 is available for processing in Step 4, 25, or 27 the following "lots" of Product A are ready for processing by Machine 125 (See Table I):

A lot which has just been processed in Step 3 and is ready for Step 4.

A lot which has just been processed in Step 24 and is ready for Step 25 .

A lot which has just been processed in Step 26 and is ready for Step 27 .

See Table I.

*** When Machine 125 is available for processing in Step 6, 25, or 27 the following "lots" of Product B are ready for processing by Machine 125 (See Table II):

A lot which has just been processed in Step 5 and is ready for Step 6

A lot which has just been processed in Step 24 and is ready for Step 25 .

A lot which has just been processed in Step 26 and is ready for Step 27 .

See Table II.

***The following rules determine which lot of Product A or Product B will be selected by Machine 125 at each instant in time when Machine 125 is next ready to accept a lot of Product A or Product B for processing:

First priority (I) is where (a) the present queue size of Machine 125 is above its historical average (i.e., the present queue size of Machine 125 is greater than its historical average) and (b) the present average of the queues for the N machines or process steps (N=2 in this example, so it is the present average of the queues for the two succeeding processing machines or process steps) used to process

a lot of Product A immediately after Step 4, 25, 27, (per the process of Table I), or

a lot of Product B immediately after Step 6, 25, 27, (per the process of Table II)

as the case may be, is below its historical average (i.e., the present average queue size for the two process steps following processing by Machine 125 is less than the historical average queue size of the two process steps). The historical average queue size is determined by adding together the historical average queue size of each of the N machines or process steps and by dividing the resulting sum by N. For example, if a machine 74 has a historical average queue size consisting of eight (8) lots of Product A and/or B and the next

succeeding machine 60 has a historical average queue size of four (4) lots of Product A and/or B, then the historical average queue size of the two machines 60, 74 together equals $(8 + 4)/2 = 6$ lots of Product A. The present average queue size is determined by adding together the present queue size of each of N machines or process steps and by dividing the resulting sum by N. For example, if a machine 74 has a present queue size consisting of four (4) lots of Product A and/or Product B, and the next succeeding machine 60 has a present queue size of six (6) lots of Products A and/or B, then the average present queue size equals $(4 + 6)/2 = 5$ lots.

In Table I, Machines 29, 30, 1, 125, 67, 73 are used in the process step pairs 5-6, 26-27, and 28-29 that immediately follow the use of Machine 125 in Steps 4, 25, 27.

In Table II, Machines 73, 74, 19, 125, 73, 74, are used in process step pairs 7-8, 26-27, 28-29 that immediately follow the use of Machine 125 in Steps 6, 25, 27.

Second priority (II) is where (a) the present queue size of Machine 125 is above its historical average and (b) the present average queue size for the N Machines used in the process step following the use of Machine 125 is also above the historical average queue size for the N Machines.

Third priority (III) is where (a) the present queue size of Machine 125 is below its historical average and (b) the present average queue size of the N Machines used in the process steps following the use of Machine 125 is also below the historical average queue size for the N Machines.

Fourth priority (IV) is where (a) the present queue size of Machine 125 is below its historical average and (b) the present queue size of the N Machine used in the process steps following the use of Machine 125 is, in contrast, above the historical average queue size for the N Machines.

***Each time Machine 125 becomes available, at that instant the present queue size of Machine 125 for each step (i.e., Steps 4, 25, 27 in Table I and Steps 6, 25, 27 in Table II) in which a finished lot of Product A or Product B has arrived from a preceding process step (i.e., Steps 3, 24, 26, respectively, in Table I and Steps 5, 24, 26 in Table II) is reviewed according to the priorities set forth above, i.e. in each instance where a lot of Product A or Product B has finished processing at another machine or production process step preceding Machine 125 and is now in the present queue of Machine 125 and ready to be processed by Machine 125, Machine 125

- (a) compares its own present queue size to its historical average queue size;
- (b) compares the present average queue size and historical average queue size of the N Machines to be used in the succeeding process steps for that lot of Product A or Product B; and,
- (c) assigns a priority to that lot of Product A or Product B based on whether the present queue sizes of Machine 125 and of the N Machines following Machine 125 are greater or less than the historical queue sizes of the same.

If a First Priority (I) Product A or Product B lot is available, it is chosen by Machine 125 for processing. If two or more First Priority (I) Product A and/or Product B lots are available, only

one of the lots is chosen based on selected criteria. By way of example, and not limitation, one such criteria used to determine which First Priority (I) lot is chosen can be that the Product A or Product B lot which first entered the queue (i.e., entered the Machine 125 queue before the other Product A lot or lots) is selected by Machine 125 for processing (First-In-First-Out, FIFO). Another such criteria might be that the Product A or Product B lot selected by Machine 125 is the one, which has the earliest due date for shipping to customer (Due-Date-First, DDF).

If a First Priority (I) Product A or Product B lot is not available, and a Second Priority (II) Product A or Product B lot is available, then the Second Priority (II) lot is chosen. If two or more Second Priority (II) lots are available, only one of the lots is chosen for processing by Machine 125 based on selected criteria.

If neither a First (I) or Second Priority (II) Product A or Product B lot is available, and a Third Priority (III) Product A or Product A lot is available, then the Third Priority (III) lot is chosen. If two or more Third Priority (III) lots are available, only one of the lots is chosen for processing by Machine 125 based on selected criteria.

If a First (I), Second (II), or Third Priority (III) Product A or Product B lot is not available, then a Fourth Priority (IV) Product A or Product B lot is chosen. If two or more Fourth (IV) Priority lots are available, only one of the lots is chosen for processing by Machine 125 based on selected criteria.

002060-80225960

At 9:20 a.m., Machine 125 has finished processing a lot of Product A or Product B and is ready to select another lot for processing.

At 9:20 a.m. the reader for Machine 125 queries the book in each of the lots in the queue of Machine 125 to determine (1) whether each lot consists of Product A or Product B, and (2) from which step in Table I or Table II the lot has traveled to the queue of Machine 125.

At 9:20 a.m. the reader for Machine 125 determines that there are five (5) lots in the queue of Machine 125, including one lot of Product A that arrived from Step 3 (Machine 12) in Table I, one lot of Product A that arrived from Step 24 (Machine 22) in Table I, one lot of Product B that arrived from Step 5 (Machine 19) in Table II, one lot of Product B that arrived from Step 24 (Machine 22) in Table II, and one lot of Product B that arrived from Step 26 (Machine 19) in Table II.

At 9:20 a.m. the reader for Machine 125 queries each of Machines 29, 30, 1, 125, 19, 125, 73, 74 to determine the present queue size for each machine and the historical average queue size for each machine. Machine 125 also queries its own memory to determine its present queue size and the historical average queue size for Machine 125. The reader receives from Machines 29, 30, 1, 125, 19, 125, 73, 74 the data set forth below in Table XV. The reader calculates the values set forth below in TABLE XVI.

TABLE XV

HISTORICAL AVERAGE QUEUE SIZE AND ACTUAL QUEUE SIZE AT 9:20 A.M.
FOR SELECTED MACHINES USED IN PRODUCTION OF PRODUCT A and
PRODUCT B

<u>Machine</u>	<u>Historical Average Queue Size</u> <u>(Lots or Boats in Product A or B)</u>	<u>Actual Queue Size</u> <u>at 9:20 A.M. (Lots or Boats)</u>
----------------	--	---

125	4	5.0
29	3.5	2.0
30	3	1.0
1	4	5.0
73	2.5	7.0
74	4.5	3.0
19	5	6.0

TABLE XVI

HISTORICAL AVERAGE QUEUE SIZE AND PRESENT AVERAGE QUEUE SIZE AT 9:20 A.M. FOR SELECTED N (N=2) MACHINE PAIRS USED IN PRODUCTION OF PRODUCT A AND PRODUCT B PER TABLES I AND II

N Machine Pair	Historical Average Queue Size	Present Average Queue Size
29 (Step 5) & 30 (Step 6) (Table I)	$(3.5 + 3)/2 = 3.25$	$(2.0 + 1.0)/2 = 1.5$
1 (Step 26) & 125 (Step 27) (Table I)	$(4 + 4)/2 = 4$	$(5.0 + 5.0)/2 = 5.0$
73 (Step 7) & 74 (Step 8) (Table II)	$(2.5 + 4.5)/2 = 3.5$	$(7.0 + 3.0)/2 = 5.0$
19 (Step 26) & 125 (Step 27) (Table II)	$(4 + 4)/2 = 4$	$(6.0 + 5.0)/2 = 5.5$

The actual queue size and present average queue size for each machine or N Machines, as the case may be, on the factory floor at 9:20 a.m. can, when the system and apparatus of the invention is utilized, be determined by the reader for machine 125 each machine or N machines on the factory floor. As would be appreciated by those of skill in the art, for purposes of this Example only the machines listed in Tables XV and XVI are necessary.

If N=3, then the queues for the three machines subsequent to Machine 125 would be averaged in Table X; if N=4, then the queues for the four machines subsequent to Machine 125 would be averaged; etc. Since in this Example 10 N=2, only the queues of the two machines subsequent to Machine 125 are averaged.

Since at 9:20 a.m. the actual queue size (5 lots—See Table XV) of Machine 125 is greater than the historical average queue size (4.0 lots—See Table XV) of Machine 125 and since the present average size (1.5 lots—See Table XVI) of the queues of Machines 29 and 30 is below the historical average queue size (3.25 lots—See Table XV) of Machines 29 and 30, the lot of Product A which is ready at 9:20 a.m. to be processed by Machine 125 in Step 4 (Table I) and to travel on to Machines 29 and 30 in Steps 5 and 6 (Table I) meets the 1st Priority criteria set forth above.

Since at 9:20 a.m. the actual queue size (5 lots—See Table Xv) of Machine 125 is above the historical average queue size (4.0 lots—See Table Xv) of Machine 125 and since the present average size (5.0 lots—See Table XVI) of the queues of Machines 1 and 125 is above the historical average queue size (4.00 lots—See Table XVI) of Machines 1 and 125, the lot of Product A which is ready at 9:20 a.m. to be processed by Machine 125 in Step 25 (Table I) and to travel on to Machines 1 and 125 in Steps 26 and 27 (Table I) meets the 2nd Priority criteria set forth above.

Since at 9:20 a.m. the actual queue size (5 lots—See Table XV) of Machine 125 is above the historical average queue size (4.0 lots—See Table XV) of Machine 125 and the present average size (5.0 lots—See Table XVI) of the queues of Machines 73 and 74 is greater than the historical average queue size (3.5 lots—See Table XVI) of Machines 73 and 74, the lot of Product B which is ready at 9:20 a.m. to be processed by Machine 125 in Step 6 and to travel on to Machines 73 and 74 in Steps 7 and 8 of Table II meets the 2nd Priority criteria set forth above.

Since at 9:20 a.m. the actual queue size (5 lots—See Table XV) of Machine 125 is

above the historical average queue size (4.0 lots—See Table XV) of Machine 125 and the present average size (5.5 lots—See Table XVI) of the queues of Machines 19 and 125 is greater than the historical average queue size (4.0 lots—See Table XVI) of Machines 15 and 125, the lot of Product B which is ready at 9:20 a.m. to be processed by Machine 125 in Step 25 and to travel on to Machines 19 and 125 in Steps 26 and 27 (Table II) meets the 2nd Priority criteria set forth above.

Since at 9:20 a.m. the actual queue size (5 lots—See Table XIII) of Machine 125 is above the historical average queue size (4.0 lots—See Table XIII) of Machine 125 and the present average size (5.0 lots—See Table XIV) of the queues of Machines 73 and 74 is above than the historical average queue size (3.5 lots—See Table XIV) of Machines 73 and 74, the lot of Product B which is ready at 9:20 a.m. to be processed by Machine 125 in Step 27 and to travel on to Machines 73 and 74 in Steps 28 and 29 (Table II) meets the 2nd Priority criteria set forth above.

At 9:20 a.m., none of the lots of Product A or Product B in the queue of machine 125 meet the 3rd Priority or 4th Priority criteria.

Since the lot of Product A ready to travel from Machine 125 to Machines 29, 30 (Steps 5 and 6 in Table I) meets the 1st Priority criteria, Machine 125, Machine 125 selects Product A for processing at Step 4 to proceed to Step 6 Machine 29 after being processed.

The reader for Machine 125 queries the book (i.e., smart card) included in the lot for Product A selected to be processed at Step 4 in Table I and determines for that lot of Product A the cycle time and batch size information set forth below in Table XVII.

TABLE XVII

PROJECTED CYCLE TIME AND BATCH SIZE INFORMATION FOR LOT OF
PRODUCT A IN QUEUE OF MACHINE 125 AFTER BEING PROCESSED IN STEP 3
IN TABLE I

Setup Time (Seconds)	Load Time (Seconds)	Process Time (Seconds)	Unload Time (Seconds)	Batch Size (Lots)
-------------------------	------------------------	---------------------------	--------------------------	----------------------

5	5	45	5	1
---	---	----	---	---

The reader for Machine 125 also reads from the smart card assigned to the boat containing Product A the product identification number assigned to the boat and queries the smart card to determine if there are special processing instructions associated with the processing of Product A. The product ID number, special processing instructions (if any), the batch size, and the setup time, load time, process time, and unload time information set forth in Table XVII above appear on the CRT or television screen used by the operator. The operator then sets up Machine 125, loads the boat into Machine 125, processes the contents of the boat, and unloads the boat from the Machine 125. Processing the contents of the boat may require that individual wafers or other components be removed from the boat, processed, and returned to the boat before the boat is unloaded or removed from the Machine 125.

After processing of the boat by Machine 125 is completed, the reader associated with Machine 125 transmits the actual cycle time information to the book on the boat. This cycle time information is stored in the book and is set forth below in Table XVIII.

TABLE XVIII

ACTUAL CYCLE TIME AND BATCH SIZE INFORMATION FOR LOT OF PRODUCT A
IN QUEUE OF MACHINE 125 AFTER BEING PROCESSED IN STEP 3 IN TABLE I

Setup Time (Seconds)	Load Time (Seconds)	Process Time (Seconds)	Unload Time (Seconds)	Batch Size (Lots)
-------------------------	------------------------	---------------------------	--------------------------	----------------------

4	6	42	5	1
---	---	----	---	---

The reader associated with Machine 125 also prompts the book to note that Process

Step 4 has been completed.

The reader for Machine 125 then directs the boat to Machine 29 so that Step 5 in Table 1 can be completed.

Having described my invention in such terms as to enable those skilled in the art to make and practice it, and having described the presently preferred embodiments thereof, I

Claim:

Claims

1. In a process for processing at least one product, the process processing a plurality of lots of the product and comprising a sequence of process steps including

- a first process step,
- a queue for the process step,
- a plurality of lots of the product in the queue, and
- a machine used in the first process step to process the product,

the improvements for increasing the efficiency of the process and reducing the time required for the product to complete the process, and including the steps of

- (a) determining the lots of the product in the queue of the first process step;
- (b) determining for each lot in the queue of the first process step the process step which was completed immediately prior to the lots' entering the queue of the first process step;
- (c) determining for each lot in the queue of the first process step
 - (i) at least the next subsequent process step to be completed by the lot after the lot is processed during the first process step,
 - (ii) the present queue size for the next subsequent process step,
 - (iii) the historical average queue size for the next subsequent process step;
- (d) determining for the first process step
 - (i) the present queue size, and
 - (ii) the historical average queue size;
- (e) making a first determination by determining whether the present queue size for the next subsequent process step is one of a pair consisting of
 - (i) greater than the historical average queue size for the next subsequent process step, and
 - (ii) less than the historical average queue size for the next subsequent process step;
- (f) making a second determination by determining whether the present queue size for the first process step is one of a pair consisting of

- (i) greater than the historical average queue size of the first process step, and
- (ii) less than the historical average queue size of the first process step; and,
- (g) comparing for each lot the first determination with the second determination to prioritize which lot is selected for processing during the first process step.

2. A system for processing at least one product, the system including

- (a) a sequence of process steps;
- (b) at least a first machine in each of the process steps;
- (c) a plurality of lots in the queue of the first machine and each including
 - (i) at least one unit of the product,
 - (ii) memory means including data identifying
 - at least one of a pair including
 - the lot, and
 - a unit of product, and
 - each of the process steps, and
 - (iii) a first transmitter-receiver device operatively associated with the memory means;
- (d) a second transmitter-receiver device;
- (e) a controller operatively associated with said second transmitter-receiver device and the first machine to generate signals causing said second transmitter-receiver device to communicate with said first transmitter-receiver device and the memory means in each of the lots to
 - (i) determine the previous process step completed by the lot,
 - (ii) confirm that the next process step for the lot requires the first machine, and
 - (iii) generate information used by the first machine to process the product.

3. In a process for processing at least one product, the process processing a plurality of lots of the product and comprising a sequence of process steps including

- a first process step,
- a queue for the process step,

a plurality of lots of the product in the queue,
a machine used in the first process step to process the product, and
at least a second process step during which the machine is used to process the product,

the improvements for increasing the efficiency of the process and reducing the time required for the product to complete the process, and including the steps of

- (a) determining the lots of the product in the queue of the first process step;
- (b) determining for each lot in the queue of the first process step the process step which was completed immediately prior to the lots' entering the queue of the first process step;
- (c) determining for each lot in the queue of the first process step
 - (i) at least the next subsequent process step to be completed by the lot after the lot is processed during the first process step,
 - (ii) the present queue size for the next subsequent process step,
 - (iii) the historical average queue size for the next subsequent process step;
- (d) determining for the first process step
 - (i) the present queue size, and
 - (ii) the historical average queue size;
- (e) making a first determination by determining whether the present queue size for the next subsequent process step is one of a pair consisting of
 - (i) greater than the historical average queue size for the next subsequent process step, and
 - (ii) less than the historical average queue size for the next subsequent process step;
- (f) making a second determination by determining whether the present queue size for the first process step is one of a pair consisting of
 - (i) greater than the historical average queue size of the first process step, and
 - (ii) less than the historical average queue size of the first process step; and,
- (g) comparing for each lot the first determination with the second determination to prioritize which lot is selected for processing during the first process step.

4. A system for processing at least one product, the system including
- (a) a sequence of process steps;
 - (b) at least a first machine in each of the process steps;
 - (c) a plurality of lots in the queue of the first machine and each including
 - (i) at least one unit of the product,
 - (ii) memory means including data identifying at least one of a pair including
 - the lot, and
 - a unit of product, andeach of the process steps, and
 - (iii) a first transmitter-receiver device operatively associated with the memory means;
 - (d) a second transmitter-receiver device; and
 - (e) controller operatively associated with said second transmitter-receiver device and said first machine to generate signals causing said second transmitter-receiver device to communicate with said first transmitter-receiver device and the memory means in each of the lots to provide said memory means with the time required for said first machine to process the lot.

Abstract of the Disclosure

A system for processing a product includes a sequence of process steps, at least one machine in each of the process steps, and a plurality of lots in the queue of the first machine. Each lot includes at least one unit of the product, a memory, and a first transmitter-receiver operatively associated with the memory. The memory identifies at least one of a pair including the lot, a unit of product. The system also includes a second transmitter-receiver device and a control operatively associated the second transmitter receiver device and the first machine to generate signals causing the second transmitter-receiver device to communicate with the first transmitter-receiver device and the memory in each of the lots to provide the memory with the time required for the first machine to process the lot.

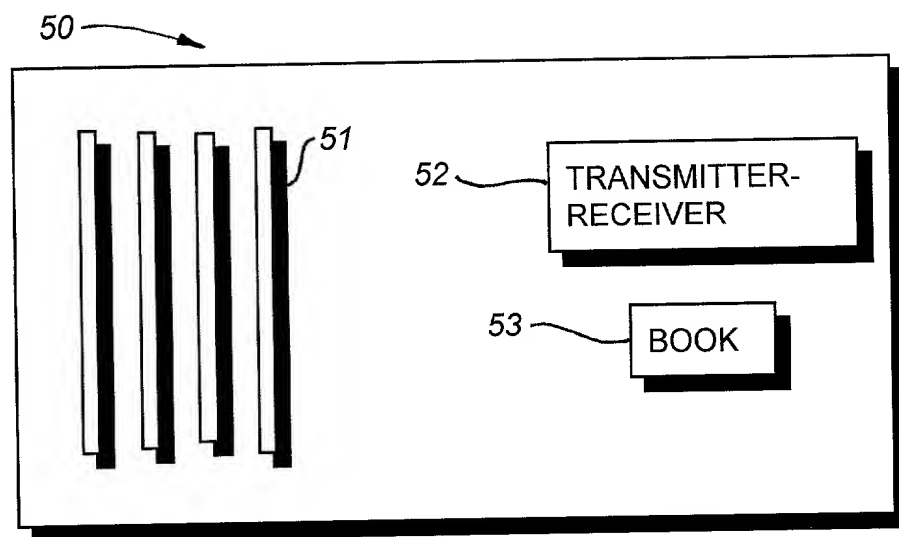


FIG. 1

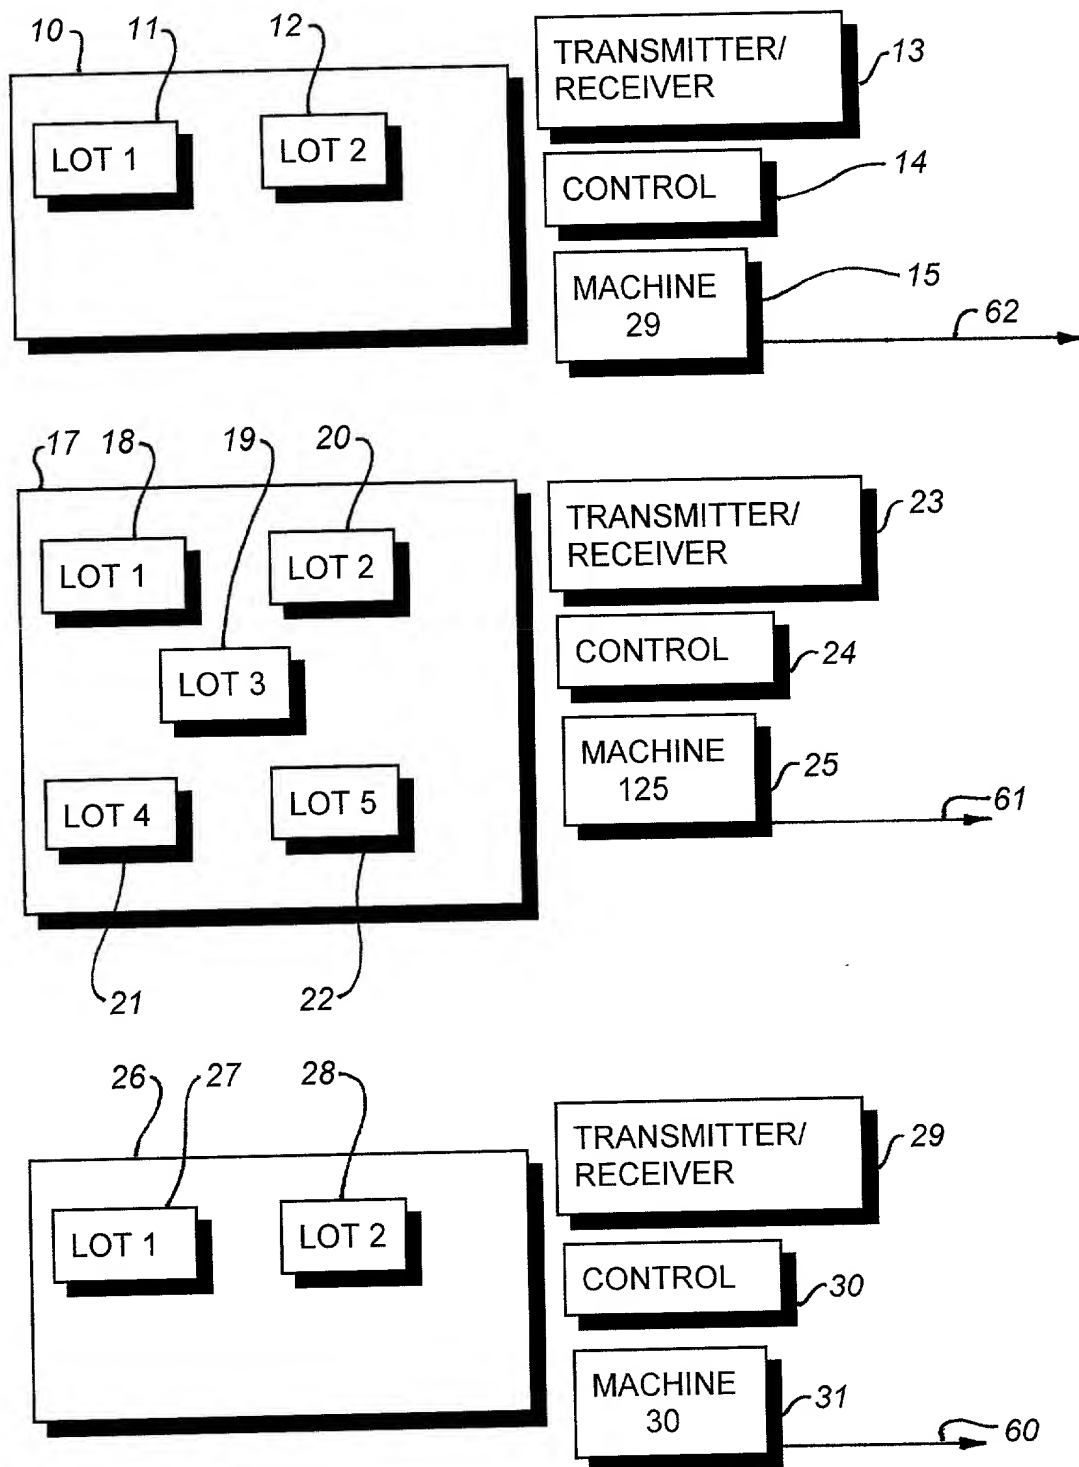


FIG. 2

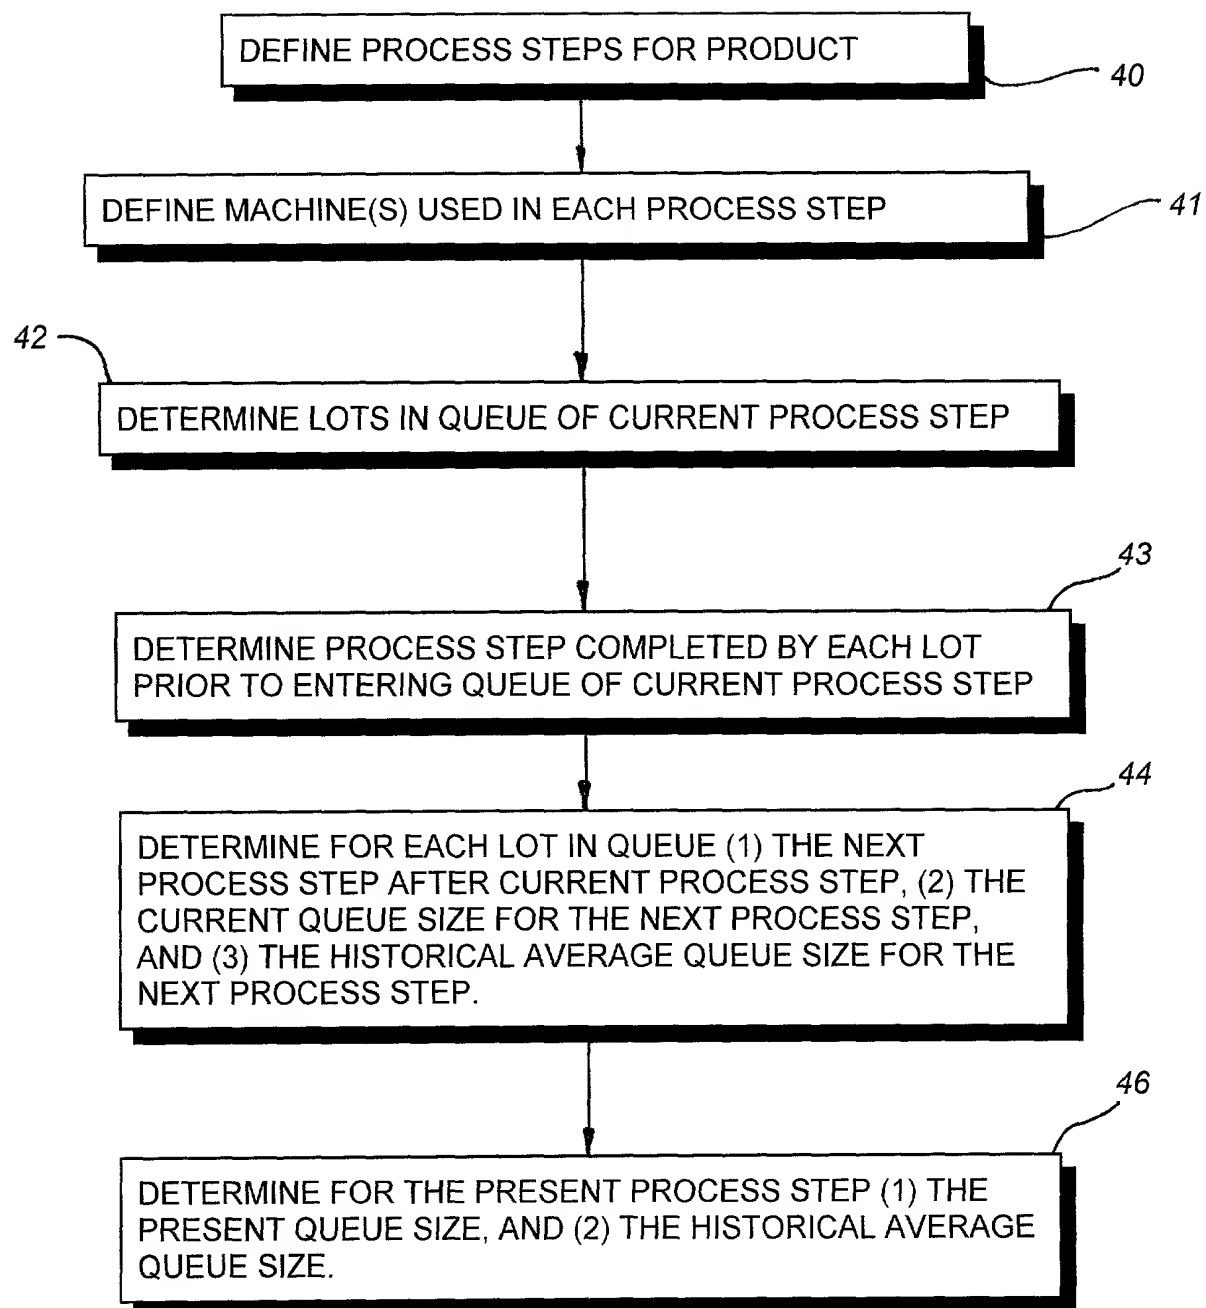


FIG. 3

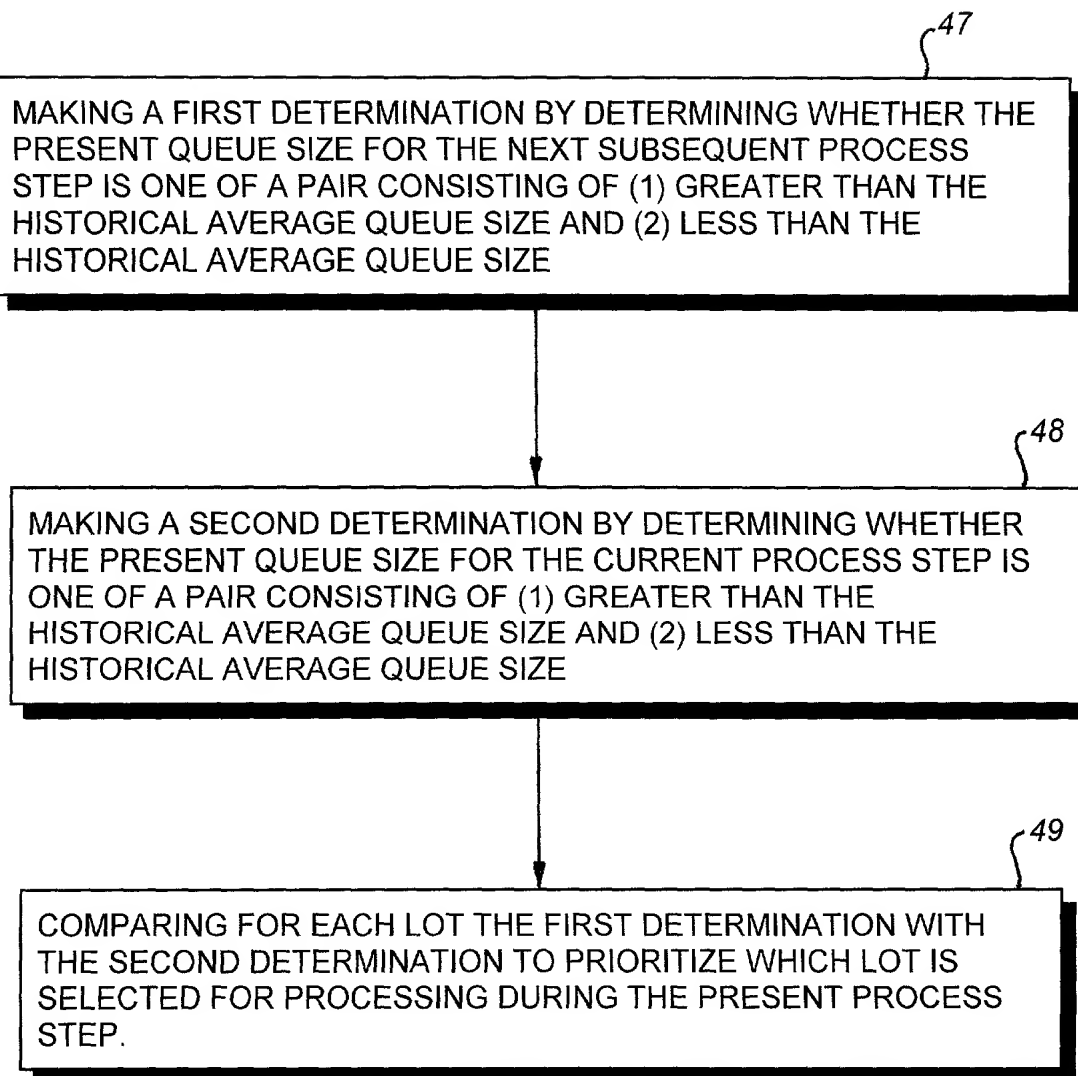


FIG. 4

DECLARATION, POWER OF ATTORNEY, AND PETITION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: METHOD AND APPARATUS FOR PROCESSING AN OBJECT the specification of which:

(check one) xx is attached hereto. _____ was filed on _____ as Application Serial No. _____ and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I hereby acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code §§ 119; 365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which the priority is claimed:

Prior Foreign Application(s)

			Priority Claimed	
N/A			Yes	No
(Number)	(Country)	Day/month/year filed		
N/A			Yes	No
(Number)	(Country)	Day/month/year filed		
N/A			Yes	No
(Number)	(Country)	Day/month/year filed		

I hereby certify that this correspondence is being deposited with the United States Postal Service as EXPRESS MAIL NO. EK 888 464127 US in an envelope addressed to ASST COMMISSIONER OF PATENTS, WASHINGTON, DC 20231 on September 7, 2000
[Signature] 9-7-00
TOD R NISSELE, Reg No. 29,241 DATE

1 I hereby claim the benefit under Title 35, United States Codes §120 of any United States application(s)
2 listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior
3 United States application in the manner provided by the first paragraph of Title 35, United States Code §112,
4 I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations
5 §156(a) which occurred between the filing date of the prior application and the national or PCT international
6 filing of this application:

7 N/A
8 (Application Serial No) (Filing Date) (Status) (patented, pending, abandoned)

9 N/A
10 (Application Serial No) (Filing Date) (Status) (patented, pending, abandoned)

11 I hereby declare that all statements made herein of my own knowledge are true and that all statements
12 made on information and belief are believed to be true; and further that these statements were made with the
13 knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both,
14 under § 1001 of the United States Code and that such willful false statements may jeopardize the validity of the
15 application or any patent issued thereon.

16 And I hereby appoint:

17 Tod R. Nissle, Esq. Reg. No. 29,241
18 TOD R. NISSLE, P.C.
19 P.O. Box 55630
20 Phoenix, Arizona 85078

21 Tel: (480) 970-8700
22 Fax: (480) 970-8707
23 Email: nissle@nissle.com

24 my attorney and will full power of substitution and revocation, to prosecute this application and to transact all
25 business in the United States Patent and Trademark Office connected therewith.

26 Wherefor I pray that Letters Patent be granted to me for the invention or discover described and
27 claimed in the foregoing specification and claims, and I hereby subscribe my name to the foregoing specification
28 and claims, declaration, power of attorney, this petition.

1 Full name of sole or first inventor: DONALD W. COLLINS

2 Inventor's signature: *Donald W. Collins* Date: 09/01/00

3 Residence: 1045 East Sandpiper Drive, Tempe, Arizona 85283

4 Citizenship: UNITED STATES OF AMERICA

5 Post Office Address: Same

6 Full name of second inventor: N/A

7 Inventor's signature: _____ Date: _____

8 Residence: _____

9 Citizenship: UNITED STATES OF AMERICA

10 Post Office Address: Same

11 (Supply similar information and signature for third and subsequent joint inventors)

12
13
14 Attorneys Docket No.: 1021-P-1